
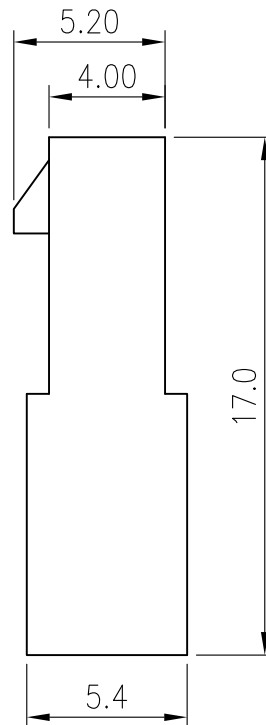


◆ SPECIFICATIONS

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 10mΩ Max.

Material: Nylon66 UL94 V-2
 Suitable: KR300HM series Terminal
 Mates With KR3000HF Series Single Row Housing
 And KR3000WF Series Single Row Wafer
 MOQ: 1,000PCS

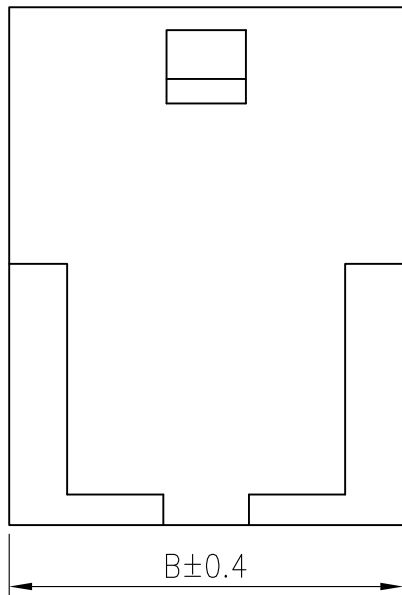

PART NO.	Dimension	
	A	B
A3000K00240P60	3.0	7.00
A3000K00340P60	6.0	10.00
A3000K00440P60	9.0	13.00
A3000K00540P60	12.0	16.00
A3000K00640P60	15.0	19.00
A3000K00740P60	18.0	22.00
A3000K00840P60	21.0	25.00
A3000K00940P60	24.0	28.00
A3000K01040P60	27.0	31.00
A3000K01140P60	30.0	34.00
A3000K01240P60	33.0	37.00

F					GENERAL TOLERANCE	UNIT: mm	DATE	TITLE: MX 3.0 Single Row Female Housing 不带翅				东莞市康瑞电子有限公司 Dongguan Konnra Electronics co., LTD.			
					.X±0.30	X°±1°	DRAWN: 闵昕皓								2013.9.9
					.XX±0.20	.X°±	CHECKED:		VER.	SCALE:	N/A	PROJECT	PART NO.	A3000K***40P60	
		LTR	NAME	DATE	VERISION RECORD	.XXX±0.10	.XX°±	APPROVED:	A	SHEET:	1/1		DRAWING NO.	3000HF102-4-S	
	1	2	3	4	5	6	7	8	9						