
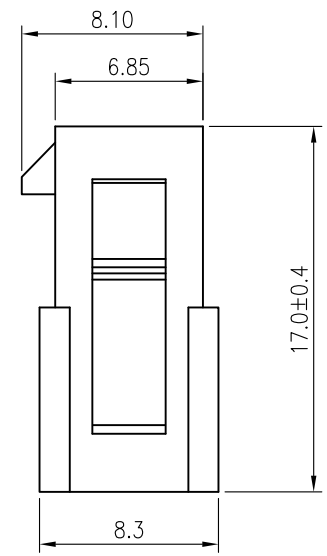


- ◆ SPECIFICATIONS
- Current rating: 5A AC, DC
  - Voltage rating: 250V AC,DC
  - Temperature range: -25°C ~ +85°C
  - Insulation resistance: 1000MΩ Min.
  - Withstanding voltage: 1500V AC/ minute.
  - Contact resistance: 10m Ω Max.

Material: Nylon66 UL94 V-2  
 Suitable: KR300 series Terminal  
 Mates With KR3000 series dual row male housing and KR3000 series dual row wafer

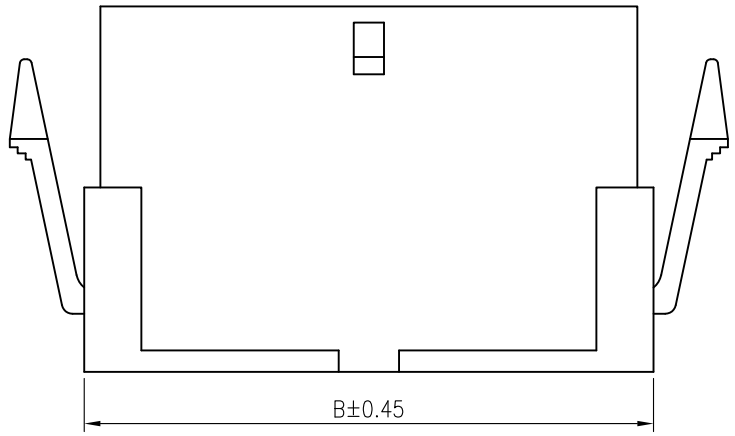

PART NO.	Dimension	
	A	B
A3000N20140P60	---	5.35
A3000N20240P60	3.0	8.35
A3000N20340P60	6.0	11.35
A3000N20440P60	9.0	14.35
A3000N20540P60	12.0	17.35
A3000N20640P60	15.0	20.35
A3000N20740P60	18.0	23.35
A3000N20840P60	21.0	26.35
A3000N20940P60	24.0	29.35
A3000N21040P60	27.0	32.35
A3000N21140P60	30.0	35.35
A3000N21240P60	33.0	38.35

△				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE:		
△				.X±0.30	X°±1°	DRAWN: 闵昕皓	MX 3.0 Dual Row Female Housing		
△				.XX±0.20	.X°±	CHECKED:	VER. SCALE: N/A		
△				.XXX±0.10	.XX°±	APPROVED:	A SHEET: 1/1		
LTR	NAME	DATE	VERISION RECORD				DRAWING NO. 3000HF201-4-S		

**东莞市康瑞电子有限公司**  
Dongguan Konnra Electronics co., LTD.

PROJECT	PART NO.	A3000N***40P60
DRAWING NO.		3000HF201-4-S