
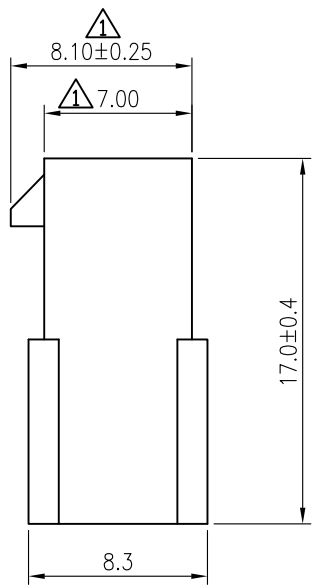


- ◆ SPECIFICATIONS
- Current rating: 5A AC, DC
  - Voltage rating: 250V AC,DC
  - Temperature range: -25°C ~ +85°C
  - Insulation resistance: 1000MΩ Min.
  - Withstanding voltage: 1500V AC/ minute.
  - Contact resistance: 10m Ω Max.

Material: Nylon66 UL94 V-2  
 Suitable: KR3000 series Terminal  
 Mates With KR3000 series dual row male housing and KR3000 series dual row wafer

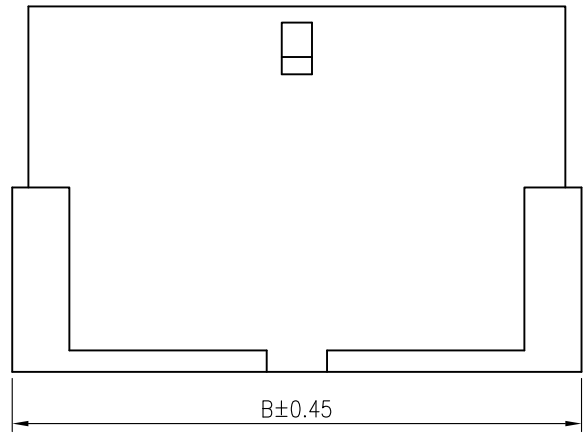

| PART NO.       | Dimension |       |
|----------------|-----------|-------|
|                | A         | B     |
| A3000K20140P60 | ---       | 5.30  |
| A3000K20240P60 | 3.0       | 8.30  |
| A3000K20340P60 | 6.0       | 11.30 |
| A3000K20440P60 | 9.0       | 14.30 |
| A3000K20540P60 | 12.0      | 17.30 |
| A3000K20640P60 | 15.0      | 20.30 |
| A3000K20740P60 | 18.0      | 23.30 |
| A3000K20840P60 | 21.0      | 26.30 |
| A3000K20940P60 | 24.0      | 29.30 |
| A3000K21040P60 | 27.0      | 32.30 |
| A3000K21140P60 | 30.0      | 35.30 |
| A3000K21240P60 | 33.0      | 38.30 |

|   |     |      |            |                   |           |            |  |        |        |
|---|-----|------|------------|-------------------|-----------|------------|--|--------|--------|
| F | △   |      |            | GENERAL TOLERANCE | UNIT: mm  | DATE       | TITLE:<br>MX 3.0 Dual Row<br>Female Housing<br>不带翅 |        |        |
|   | △   |      |            | .X±0.30           | X°±1°     | DRAWN: 闵昕皓 |  |        |        |
|   | △   |      |            | .XX±0.20          | .X°±      | CHECKED:   |  |        |        |
|   | △   | 闵昕皓  | 2015.03.11 | 更正尺寸规格            | .XXX±0.10 | .XX°±      | APPROVED:  |        |        |
|   | LTR | NAME | DATE       | VERISION RECORD   |           |            |  | VER.   | SCALE: |
|   |     |      |            |                   |           |            | A  | SHEET: | 1/1    |

**东莞市康瑞电子有限公司**  
Dongguan Konnra Electronics co., LTD.

|             |          |                |
|-------------|----------|----------------|
| PROJECT     | PART NO. | A3000K***40P60 |
| DRAWING NO. |          | 3000HF202-4-S  |