
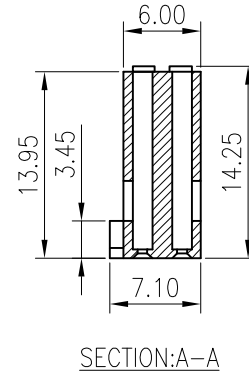
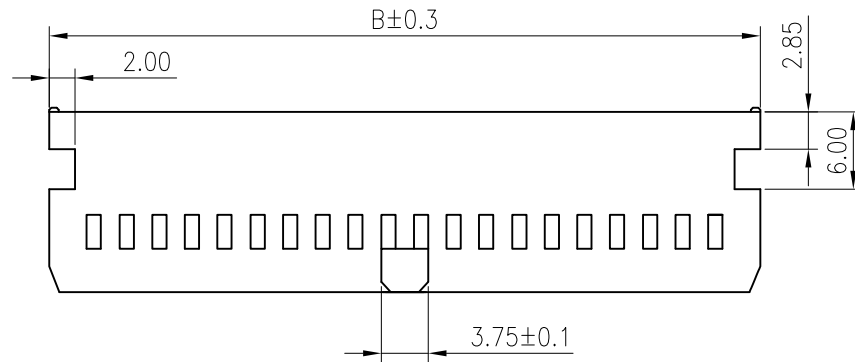
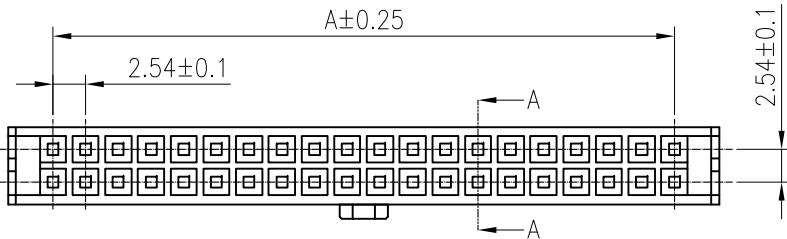


◆ SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 20mΩ Max.

MATERIAL : PBT UL94V-0
 SUITABLE KR2545 SERIES Terminal
 MOQ:1000PCS

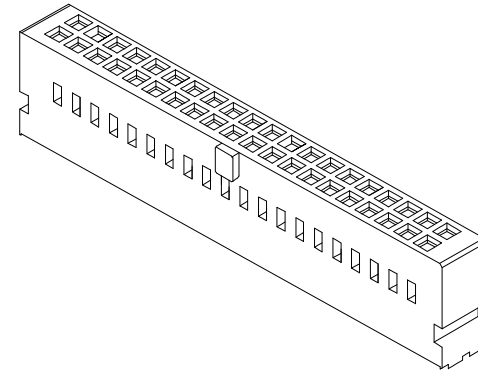

PART No.	Dimension		PART No.	Dimension	
	A	B		A	B
A2545T20230PB0	2.54	9.48	A2545T21830PB0	43.18	50.12
A2545T20330PB0	5.08	12.02	A2545T21930PB0	45.72	52.66
A2545T20430PB0	7.62	14.56	A2545T22030PB0	48.26	55.20
A2545T20530PB0	10.16	17.10	A2545T22130PB0	50.80	57.74
A2545T20630PB0	12.70	19.64	A2545T22230PB0	53.34	60.28
A2545T20730PB0	15.24	22.18	A2545T22330PB0	55.88	62.82
A2545T20830PB0	17.78	24.72	A2545T22430PB0	58.42	65.36
A2545T20930PB0	20.32	27.26	A2545T22530PB0	60.96	67.90
A2545T21030PB0	22.86	29.80	A2545T22630PB0	63.50	70.44
A2545T21130PB0	25.40	32.34	A2545T22730PB0	66.04	72.98
A2545T21230PB0	27.94	34.88	A2545T22830PB0	68.58	75.52
A2545T21330PB0	30.48	37.42	A2545T22930PB0	71.12	78.06
A2545T21430PB0	33.02	39.96	A2545T23030PB0	73.66	80.60
A2545T21530PB0	35.56	42.50	A2545T23130PB0	76.20	83.14
A2545T21630PB0	38.10	45.04	A2545T23230PB0	78.74	85.68
A2545T21730PB0	40.64	47.58			

△				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE:		
③				.X±0.30	X°±1°	DRAWN: 朱佑武	HRS 2.54mm Crimp		
△				.XX±0.20	.X°±	CHECKED:	Style Dual Row		
△				.XXX±0.10	.XX°±	APPROVED:	VER.	SCALE:	N/A
LTR	NAME	DATE	VERSION RECORD				A	SHEET:	1/1

东莞市康瑞电子有限公司
 Dongguan Konnra Electronics co., LTD.

PROJECT	PART NO.	A2545T2**30PB0
DRAWING NO.		2545H01-3-S