


◆ SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 20mΩ Max.

MATERIAL : Phosphor Bronze
 Applicable Wires: AWG#28~#22
 Insulation O.D.: 1.6mm Max.
 SUITABLE KR2545 SERIES Housing
 MOQ:10,000PCS

B2545MB3AA100

Plating:
 B=Selective Gold Plated
 G=Gold Plated
 T=Tin Plated

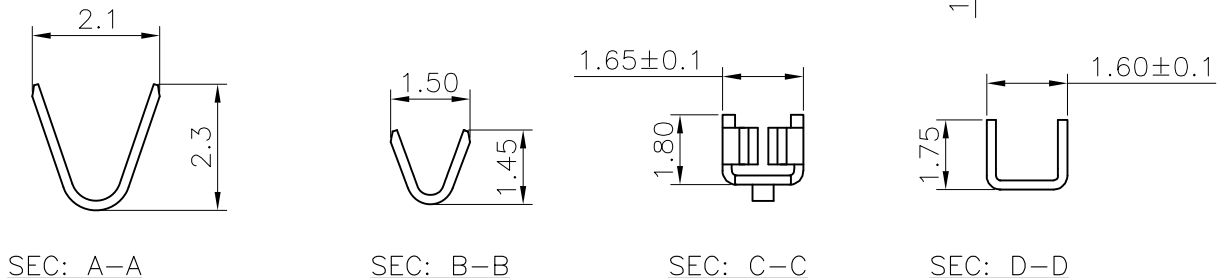

F				GENERAL TOLERANCE		UNIT: mm		DATE		东莞市康瑞电子有限公司 Dongguan Konnra Electronics co., LTD.		
				.X±0.30	X°±1°	DRAWN: 朱佑武		2012.11.26		TITLE: HRS 2.54 Crimp Termianl		
				.XX±0.20	.X°±	CHECKED:				PROJECT PART NO. B2545MB3AA100		
	LTR NAME DATE VERISION RECORD			.XXX±0.10	.XX°±	APPROVED:				DRAWING NO. 2545T01-3-S		
									VER. SCALE: N/A			
									A SHEET: 1/1			
									DRAWING NO. 2545T01-3-S			