

RoHS
COMPLIANT








◆ SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 125V AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 250V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: Housing: Nylon 66 UL94-V0
 Suitable: KR1250 series Terminal
 Mates with: KR1250W series Wafer And
 KR1251 Housing
 Q'ty: 1,000PCS

PART NO.: H125001**0101B

PIN NO. 00: Halogen free
 102=02P 01: Conventional products
 103=03P...

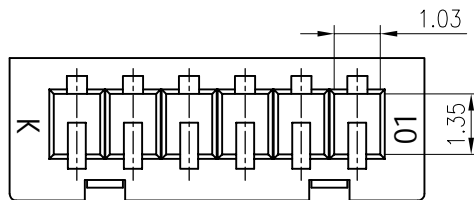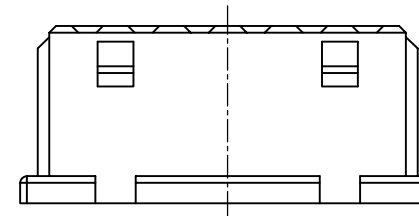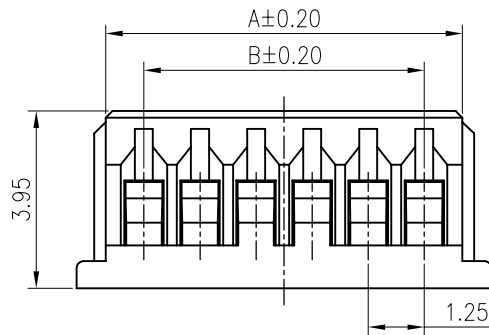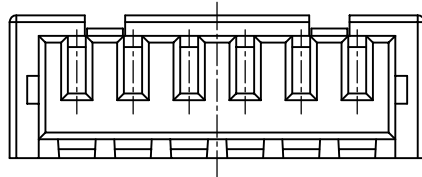

PIN NO.	A	B
02P	2.95	1.25
03P	4.20	2.50
04P	5.45	3.75
05P	6.70	5.00
06P	7.95	6.25
07P	9.20	7.50
08P	10.45	8.75
09P	11.70	10.00
10P	12.95	11.25
11P	14.20	12.50
12P	15.45	13.75
13P	16.70	15.00
14P	17.95	16.25
15P	19.20	17.50
16P	20.45	18.75

F	△4				TOLERANCE	TITLE:	DRAWN:	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
	△3				X.X ±0.30	MK1.25 Housing DDJ	CHECKED:			
	△2	更改料号及图框格式	TLX	2020.04.08	X.XX ±0.20		APPROVED:	PART NO.: H125001**010*B		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.10	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV.: A2
	1	2	3	4		5	6	7	8	9