

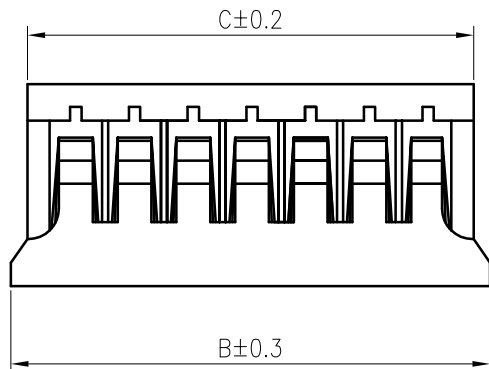



RoHS
COMPLIANT

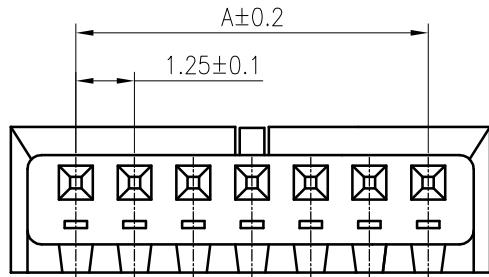

SPECIFICATIONS

1. Current rating: 1A AC, DC
2. Voltage rating: 200V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material: PA66 UL94 V-0
Suitable KR1254 series terminal
Mate with KR1254 series wafer

Ordering Code:

H12540 102 17 01A

No.of Circuits — 102
102:02,115:15
Insulator Material — 17
17:PA66 Brown V0

Circuits	Dimensions			Circuits	Dimensions		
	A	B	C		A	B	C
2	1.25	3.95	3.25	9	10.00	12.70	12.00
3	2.50	5.20	4.50	10	11.25	13.98	13.25
4	3.75	6.45	5.75	11	12.50	15.20	14.50
5	5.00	7.70	7.00	12	13.75	16.45	15.75
6	6.25	8.95	8.25	13	15.00	17.70	17.00
7	7.50	10.20	9.50	14	16.25	18.95	18.25
8	8.75	11.45	10.75	15	17.50	20.20	19.50

F					TOLERANCE X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°	TITLE: JAE1.25 Housing	DRAWN: Arvin 2020.03.05		KONNRA 东莞市康瑞电子有限公司		
							CHECKED:		DongGuan Konnra Electronics Co., Ltd.		
		更改料号及图框格式	Arvin	2020.03.05			APPROVED:		PART NO. : H125401081701A		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A2
	1	2	3	4	5	6	7	8	9		