RoHS COMPLIANT







SPECIFICATIONS
1. Current rating: 3A AC, DC
2. Voltage rating:250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material: Phosphor Bronze
Plating: Tin plated over nickel
Applicable wire :
Conductor size: AWG#28~#32
Insulation O.D.: 1.00mm Max.
Suitable KR1254 series housing
Q'ty/Reel: 10,000 PCS

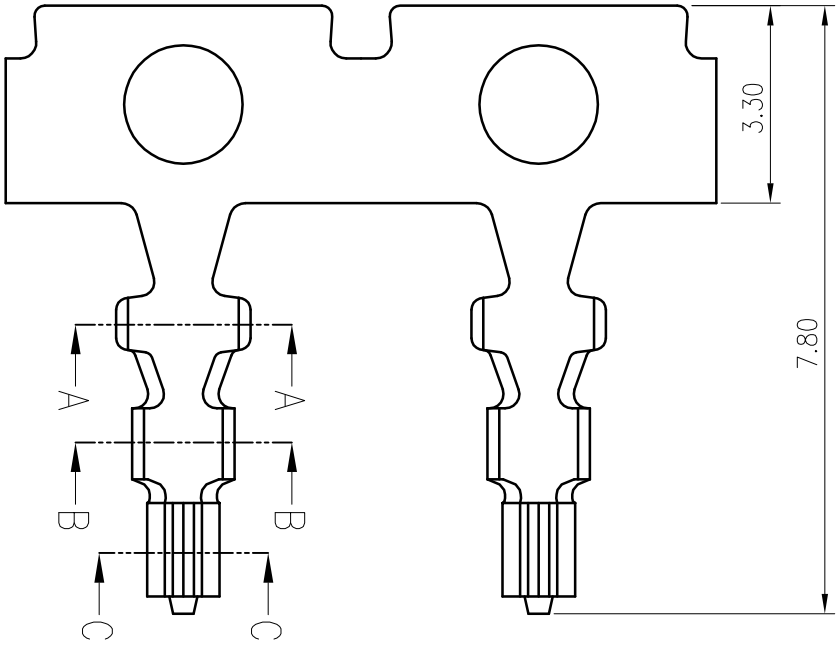


SECTION A–A

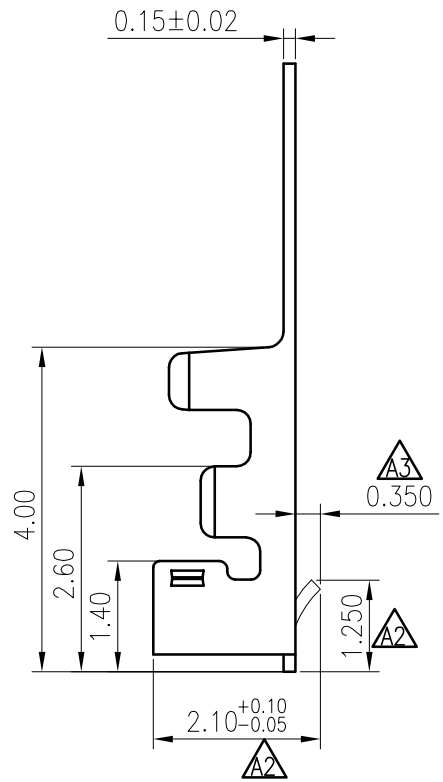


SECTION B–B




SECTION C–C A2

| MARK | REVISION DESCRIPTION | SIGNATURE | DATE |
|---|---|---|---|
| A4 | 更改料号及图框格式 | Arvin | 2020.04.10 |
| A3 | 增加尺寸规格 | Arvin | 2017.06.19 |
| A2 | 增加尺寸规格及视图 | Arvin | 2017.05.09 |

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE: JAE 1.25 Terminal

UNIT:mm | SCALE:N/A

DRAWN: Arvin 2020.04.10
CHECKED:
APPROVED:
SHEET:1/1 | PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.:T12540PT0101A
REV.:A4 | DRAWING NO.:1254T101-A-S