RoHS COMPLIANT

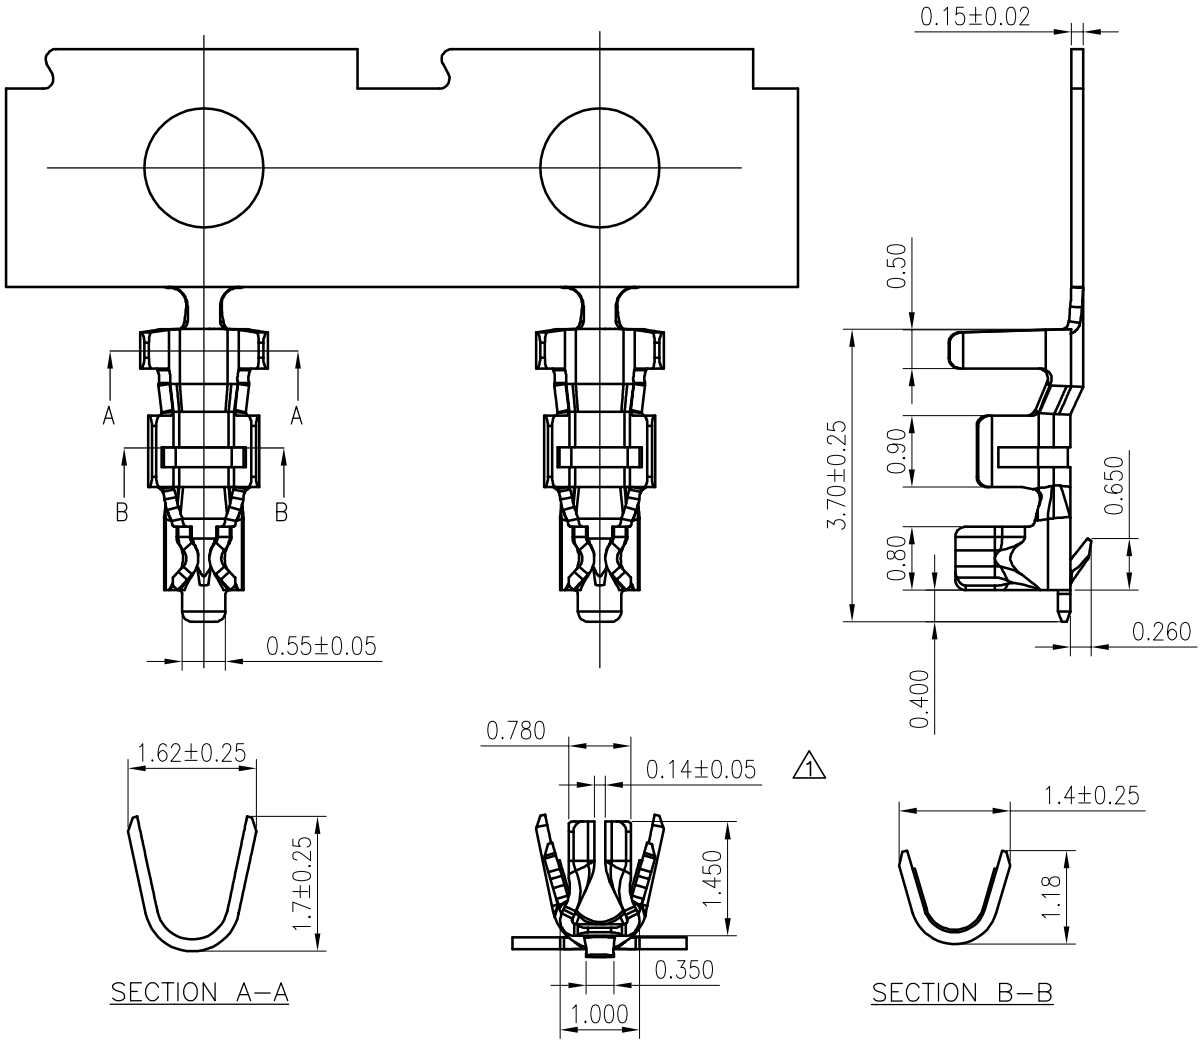

SPECIFICATIONS
1. Current rating: 1A AC, DC
2. Voltage rating: 150V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 500MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 30mΩ Max.

Applicable Wires:
AWG#26~#30
Insulation O.D : 1.00mm MAX
Material: Phosphor Bronze
Finish: Tin Plated over Nickel Suitable
KR1256 series housing
Q'ty/reel: 10,000PCS

MARK	REVISION DESCRIPTION	SIGNATURE	DATE
A3			
A2	更改料号及图框格式	LJT	2020.04.01

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE: DF13 Terminal

DRAWN: Liujingtian 2020.04.01
CHECKED:
APPROVED:

UNIT:mm | SCALE:N/A | SHEET:1/1 | PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.:T12560PT0101B
REV.:A2 | DRAWING NO.:1256T101-B-S