




RoHS
COMPLIANT

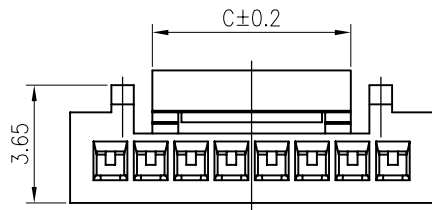


7~15P





5~6P




2~4P

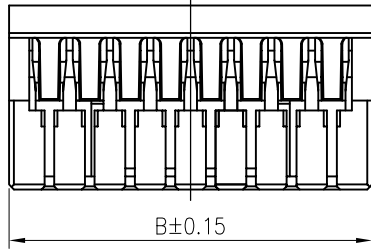


B±0.15

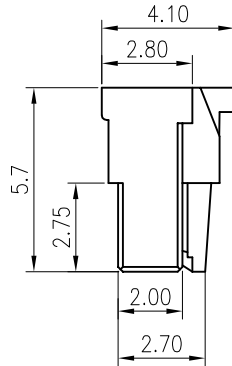

5~6P




2~4P

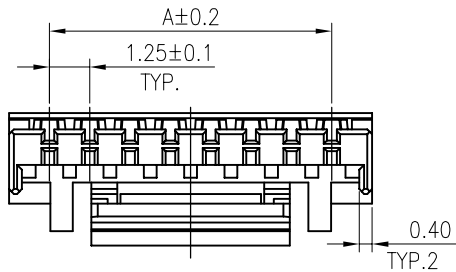

A±0.2

1.25±0.1
TYP.

0.40
TYP.2



SPECIFICATIONS

Current rating: 1A AC, DC
Voltage rating: 50V AC, DC
Temperature range: -40°C ~ +105°C
Insulation resistance: 100MΩ/ min.
Withstanding voltage: 500V AC/ minute.
Contact resistance: 30mΩ/ max.

Material: Nylon66 UL94 V-0
Suitable KR1259 Series Terminal
Mates With KR1259 Series Wafer

Ordering Code:

H125901****01A
002=02P 01: PA66 UL94 V-0 white
003=03P 20: PA66 UL94 V-0 white
24: PBT white

Circuits	Dimensions		
	A	B	C
2	1.25	3.85	1.90
3	2.50	5.10	2.90
4	3.75	6.35	4.15
5	5.00	7.50	4.15
6	6.25	8.75	6.15
7	7.50	10.00	6.15
8	8.75	11.25	6.15
9	10.00	12.50	6.15
10	11.25	13.75	8.10
11	12.50	15.00	8.10
12	13.75	16.25	8.10
13	15.00	17.50	8.10
14	16.25	18.75	8.10
15	17.50	20.00	8.10

F		更改料号及图框格式	TLX	2020.03.28	TOLERANCE X.X ±0.25 X.XX ±0.15 X.XXX ±0.08 Angle ±2°	TITLE: GH1.25 Housing	DRAWN: TLX 2020.03.28	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.			
		变更使用温度	Arvin	2018.12.13							CHECKED:
		变更2-4P的B尺寸	龙一蛟	2014.07.25							APPROVED:
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV.: A3	DRAWING NO.: 1259H01-1-S		

1

2

3

4

5

6

7

8

9