



RoHS
COMPLIANT

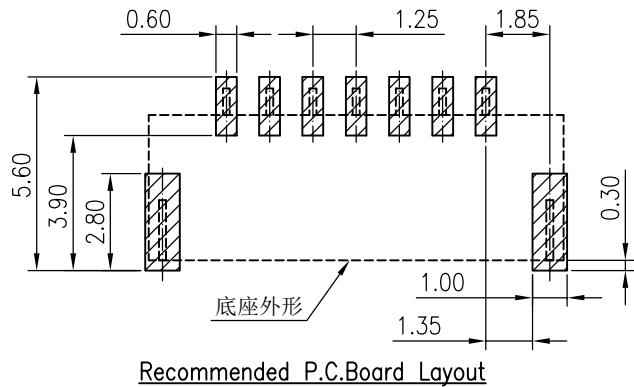

Ordering code:
C1259VS * 09 M01 ** RA**
 102: 2P
 114: 14P
 09: PA6T Natural
 M01: 雾锡
 B01: 半金雾锡
 1: 无卡槽
 3: 有卡槽



SPECIFICATIONS
 Current rating: 1A AC, DC
 Voltage rating: 50V AC, DC
 Temperature range: -40°C ~ +105°C
 Insulation resistance: 100MΩ/ min.
 Withstanding voltage: 500V AC/ minute.
 Contact resistance: 30mΩ/ max.

Material:
 Insulator: PA6T UL94V-0
 Contact: Phosphor bronze
 Solder tabs: Brass
 Finish: Tin plated or selective gold plated over nickel
 Mate With kr1259 series housing

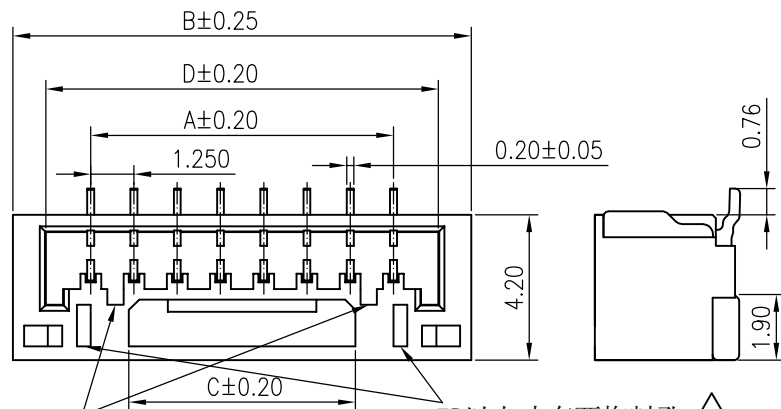

8-14P有此结构卡槽
 2-7P无此结构卡槽

7P以上才有两掏料孔

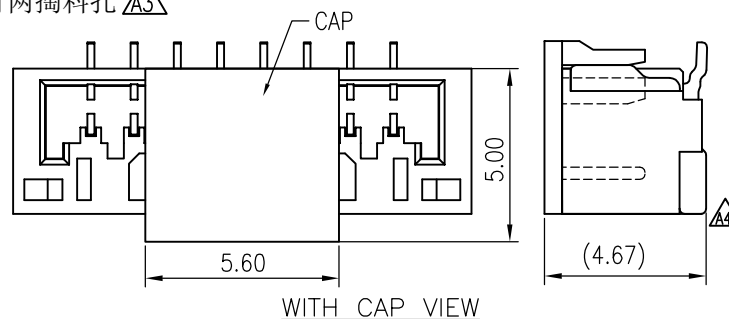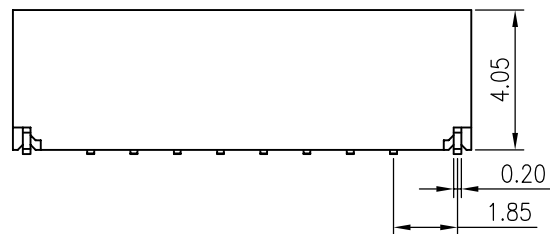

PIN No	DIMENSIONS			
	A	B	C	D
2P	1.25	5.75	2.20	3.75
3P	2.50	7.00	3.30	5.00
4P	3.75	8.25	4.55	6.25
5P	5.00	9.50	4.55	7.50
6P	6.25	10.75	6.55	8.75
7P	7.50	12.00	6.55	10.00
8P	8.75	13.25	6.55	11.25
9P	10.00	14.50	6.55	12.50
10P	11.25	15.75	8.55	13.75
11P	12.50	17.00	8.55	15.00
12P	13.75	18.25	8.55	16.25
13P	15.00	19.50	8.55	17.50
14P	16.25	20.75	8.55	18.75

F		ADD 14P规格	Arvin	2021.2.2	TOLERANCE X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°	TITLE: GH 1.25 SMT 180° Wafer	DRAWN: ru yi 2020.03.10		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.
		ADD 备注说明	wesley	2020.5.22			CHECKED:		
		更改料号及图框格式	Ru yi	2020.3.10			APPROVED:		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	
	1	2	3	4	5	6	7	8	9