RoHS COMPLIANT

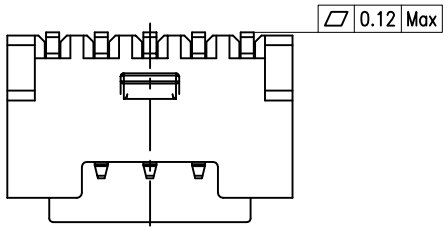



3D View

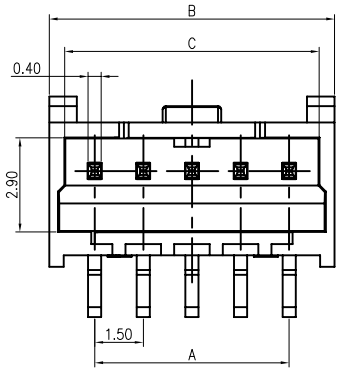

4-15P





◆SPECIFICATIONS
- ●Current rating: 2.5A AC, DC
- ●Voltage rating: 250V AC,DC
- ●Temperature range: -40°C ~ +105°C
- ●Insulation resistance:1000MΩ Min.
- ●Withstanding voltage: 500V AC/ minute.
- ●Contact resistance: 20mΩ Max.

Material:
Insulator: PA6T UL 94V-0(2-10P)
LCP UL 94V-0(11-15P)
Contact: Brass
Plating: Tin plated over Nickel
Suitable: KR1500 series Housing

C1500VS1**09M0102RA (A3)
- 02: 2P
- 16: 16P
- 09: PA6T本色
- 13: LCP本色 (A2)
- M01: 雾锡
- G01: 漂金
- R: 卷装
- P: 袋装

Dimensions			
Pin	A	B	C
2P	1.50	4.30	3.35
3P	3.00	5.80	4.85
4P	4.50	7.30	6.35
5P	6.00	8.80	7.85
6P	7.50	10.30	9.35
7P	9.00	11.80	10.85
8P	10.50	13.30	12.35
9P	12.00	14.80	13.85
10P	13.50	16.30	15.35
11P	15.00	17.80	16.85
12P	16.50	19.30	18.35
13P	18.00	20.80	19.85
14P	19.50	22.30	21.35
15P	21.00	23.80	22.85

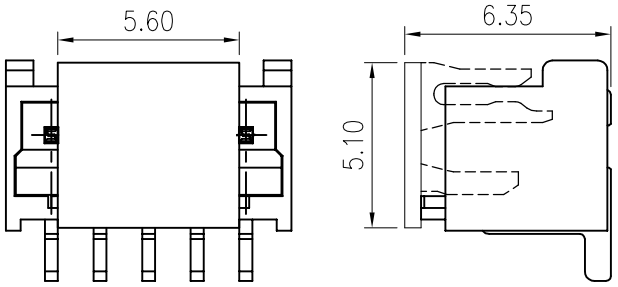

WITH CAP VIEW



A4 2-3P

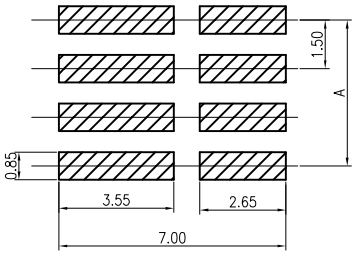

P.C.Board Layout

MARK	REVISION DESCRIPTION	SIGNATURE	DATE
A4	增加2-3P视图	Arvin	2021.02.23
A3	更改料号及图框格式	Ru yi	2020.3.10
A2	11-15P变更材质	Arvin	2019.03.13

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE: MX1.5带扣 SMT 180° Wafer

UNIT:mm | SCALE:N/A | SHEET:1/1 | PROJECTION

DRAWN: ru yi 2020.03.10
CHECKED:
APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.:C1500VS1****M01**RA

REV.:A4 | DRAWING NO.:1500WVS02-A-S