



RoHS
COMPLIANT

◆SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 100V AC,DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 500MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20m Ω Max.




Material: Nylon 66 UL 94V-0
Suitable KR1501 series terminal
mates with KR1501 series wafer

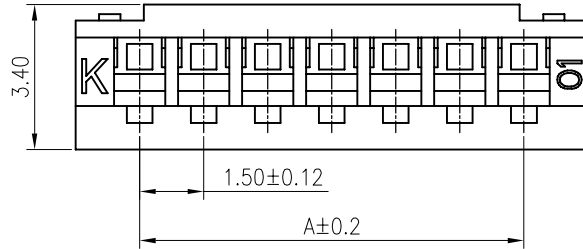

Ordering Code:

H150101****0*A
 102=2P 00: Halogen free
 103=3P 01: Conventional products

 01: PA66 UL94 V-0 white
 02: PA66 UL94 V-0 black
 17: PA66 brown
 19: PA66 UL94 V-0 gray
 35: PA66 UL94 V-0 purple

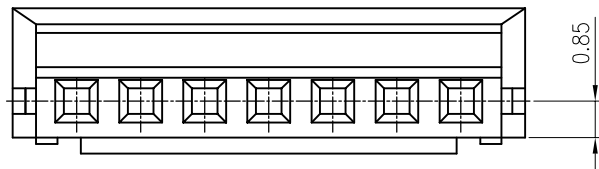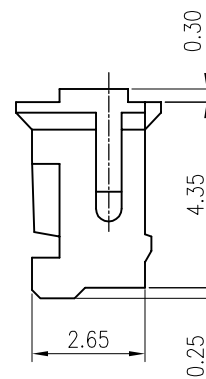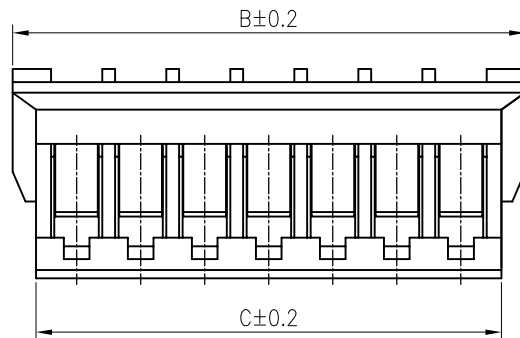

Circuits	Dimensions		
	A	B	C
2PIN	1.50	4.50	3.40
3PIN	3.00	6.00	4.90
4PIN	4.50	7.50	6.40
5PIN	6.00	9.00	7.90
6PIN	7.50	10.50	9.40
7PIN	9.00	12.00	10.90
8PIN	10.50	13.50	12.40
9PIN	12.00	15.00	13.90
10PIN	13.50	16.50	15.40
11PIN	15.00	18.00	16.90
12PIN	16.50	19.50	18.40
13PIN	18.00	21.00	19.90
14PIN	19.50	22.50	21.40
15PIN	21.00	24.00	22.90
16PIN	22.50	25.50	24.40

F					TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: ZH1.5 Housing	DRAWN: TLX 2020.03.28		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
							CHECKED:				
		更改料号及图框格式	TLX	2020.03.28			APPROVED:		PART NO. : H150101****0*A		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A2
	1	2	3	4	5	6	7	8	9		