



RoHS
COMPLIANT


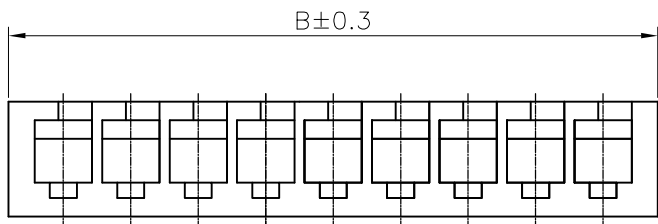


P.C.B. LAYOUT


◆ SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 200V AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 500MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: Nylon 66 UL 94V-0
Suitable: KR1502 series Terminal

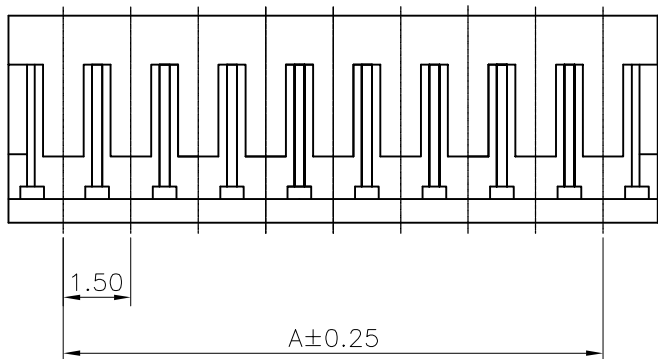

PART No.	Dimension	
	A	B
H150201020101A	1.50	3.70
H150201030101A	3.00	5.20
H150201040101A	4.50	6.70
H150201050101A	6.00	8.20
H150201060101A	7.50	9.70
H150201070101A	9.00	11.20
H150201080101A	10.50	12.70
H150201090101A	12.00	14.20
H150201100101A	13.50	15.70
H150201110101A	15.00	17.20
H150201120101A	16.5	18.70
H150201130101A	18.00	20.20
H150201140101A	19.50	21.70
H150201150101A	21.00	23.20
H150201160101A	22.50	24.70



	更改料号及图框格式	TLX	2020.03.28
MARK	REVISION DESCRIPTION	SIGNATURE	DATE

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:	SZN1.5 Housing
UNIT: mm	SCALE: N/A

DRAWN:	TLX 2020.03.28
CHECKED:	
APPROVED:	
SHEET: 1/1	PROJECTION

KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.	
PART NO. :	H150201**0101A
REV. : A2	DRAWING NO. : 1502H01-A-S