



RoHS  
COMPLIANT

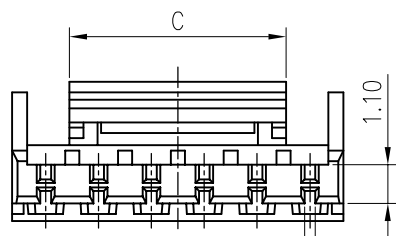


0.30




MARK

穴号

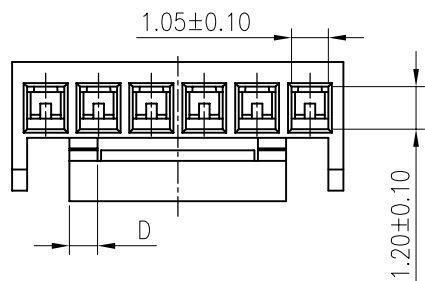



1.05±0.10

1.20±0.10




1.50


2.75



2P



3P

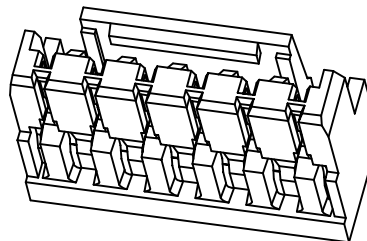

SPECIFICATIONS

Current rating: 1A AC, DC  
Voltage rating: 50V AC, DC  
Temperature range: -40°C ~ +105°C  
Insulation resistance: 100MΩ/ min.  
Withstanding voltage: 500V AC/ minute.  
Contact resistance: 30mΩ/ max.

Material: Nylon66 UL94 V-0  
Suitable KR1259 Series Terminal  
Mates With KR1506 Series Wafer

Ordering code:  
H15060 \*\*\* 0101A  
102=02P  
103=03P  
.....

PIN数	尺寸			
	A	B	C	D
2P	1.50	3.00	1.90	0.80
3P	3.00	4.50	2.90	
4P	4.50	6.40	4.15	
5P	6.00	7.90	4.15	
6P	7.50	9.40	6.15	

F	△4				TOLERANCE	TITLE:	DRAWN:	KONNRA 东莞市康瑞电子有限公司		
	△3				X.X ±0.25	GH1.5 Housing	CHECKED:	DongGuan Konnra Electronics Co., Ltd.		
	△2	更改料号及图框格式	TLX	2020.04.08	X.XX ±0.15		APPROVED:	PART NO. : H150601**0101A		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.08	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A2
	1	2	3	4		5	6	7	8	9