

**RoHS**  
COMPLIANT

**SPECIFICATIONS**





- 1. Current rating: 2A AC, DC
- 2. Voltage rating: 100V AC, DC
- 3. Temperature range: -40°C ~ +105°C
- 4. Insulation resistance: 1000MΩ/ min.
- 5. Withstanding voltage: 800V AC/ minute.
- 6. Contact resistance: 20mΩ/ max.

Material: PA66 UL94 V-0  
Suitable KR2001 series terminal  
Mate with KR2001 series wafer

Ordering Code:

H20010 \*\*\* 01 01B

No. of Circuits }  
102:2, 116:16 }  
Insulator Material }  
01: PA66 White V0 }  
02: PA66 Black V0 }

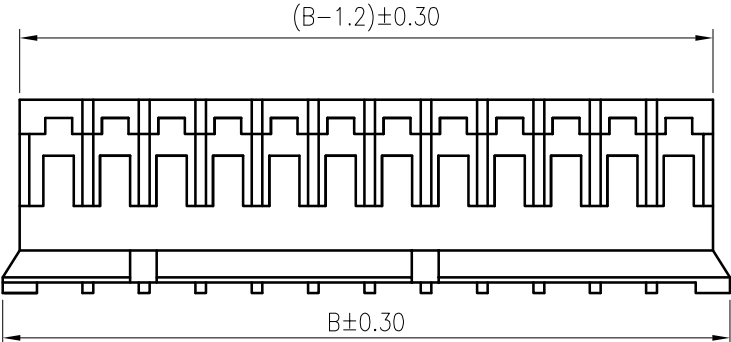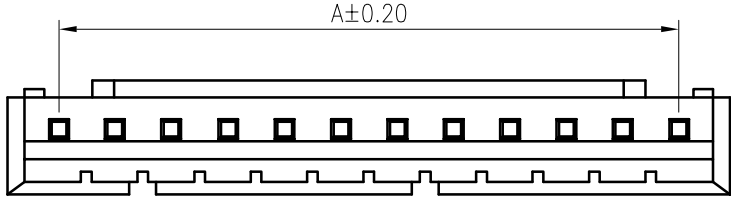

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
02	2.00	5.80	10	18.00	21.80
03	4.00	7.80	11	20.00	23.80
04	6.00	9.80	12	22.00	25.80
05	8.00	11.80	13	24.00	27.80
06	10.00	13.80	14	26.00	29.80
07	12.00	15.80	15	28.00	31.80
08	14.00	17.80	16	30.00	33.80
09	16.00	19.80			

F	△4				TOLERANCE X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°	TITLE: PH2.0 Housing	DRAWN: Arvin 2020.04.28		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
	△3						CHECKED:				
	△2	更改料号及图框格式	Arvin	2020.04.28			APPROVED:		PART NO. : H20010*****01B		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A2
	1	2	3	4	5	6	7	8	9		