



RoHS
COMPLIANT



◆ SPECIFICATIONS

- Current rating: 2A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 800V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: Nylon 66 UL 94V-0

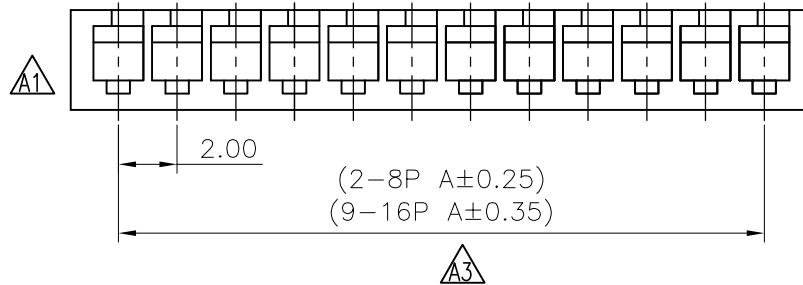

Recommended P.C.Board Layout

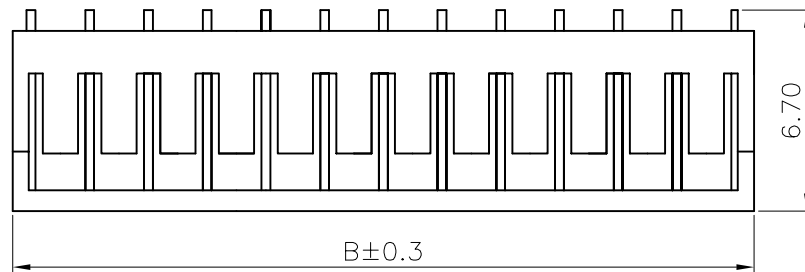

PART No.	Dimension mm	
	A	B
H2003R1020101A	2.00	5.20
H2003R1030101A	4.00	7.20
H2003R1040101A	6.00	9.20
H2003R1050101A	8.00	11.20
H2003R1060101A	10.00	13.20
H2003R1070101A	12.00	15.20
H2003R1080101A	14.00	17.20
H2003R1090101A	16.00	19.20
H2003R1100101A	18.00	21.40
H2003R1110101A	20.00	23.40
H2003R1120101A	22.00	25.40
H2003R1130101A	24.00	27.40
H2003R1140101A	26.00	29.40
H2003R1150101A	28.00	31.40
H2003R1160101A	30.00	33.40

F	更改料号及图框格式	TLX	2020.03.28	TOLERANCE X. X ± 0.30 X. XX ± 0.20 X. XXX ± 0.10 Angle ± 2°	TITLE: SAN2.0 90° Housing	DRAWN: TLX 2020.03.28		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
	增加9-16P公差A±0.35MM	TLX	2019.08.06			CHECKED:				
	修正推荐用P.C.B孔径规格	闵昕皓	2016.11.25			APPROVED:		PART NO. : H2003R1**0101A		
	MARK	REVISION DESCRIPTION	SIGNATURE			DATE	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION