



RoHS
COMPLIANT



◆ SPECIFICATIONS

- Current rating: 2A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 800V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: Nylon 66 UL 94V-0

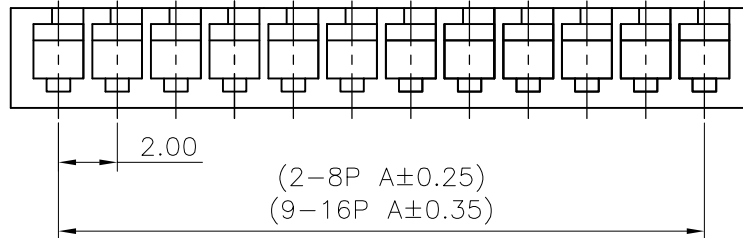

Recommended P.C.Board Layout

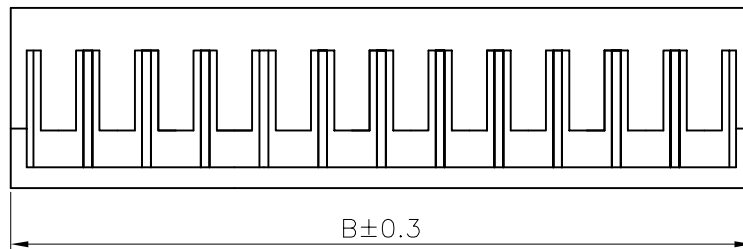

PART No.	Dimension mm	
	A	B
H2003V1020101A	2.00	5.20
H2003V1030101A	4.00	7.20
H2003V1040101A	6.00	9.20
H2003V1050101A	8.00	11.20
H2003V1060101A	10.00	13.20
H2003V1070101A	12.00	15.20
H2003V1080101A	14.00	17.20
H2003V1090101A	16.00	19.20
H2003V1100101A	18.00	21.40
H2003V1110101A	20.00	23.40
H2003V1120101A	22.00	25.40
H2003V1130101A	24.00	27.40
H2003V1140101A	26.00	29.40
H2003V1150101A	28.00	31.40
H2003V1160101A	30.00	33.40

F					TOLERANCE	TITLE:	DRAWN:	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
					X. X ± 0.30	SAN2.0 180° Housing	CHECKED:			
		更改料号及图框格式	TLX	2020.03.28	X. XX ± 0.20		APPROVED:			
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X. XXX ± 0.10	UNIT: mm	SCALE: N/A		SHEET: 1/1	PROJECTION