



RoHS
COMPLIANT

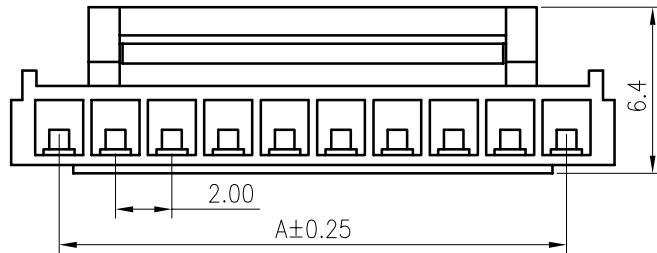

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.



Material: PA66 UL94 V-2
Suitable KR2004 series terminal
Mate With KR2004 series wafer

Ordering Code:

H20040 *** 03 01A

No.of Circuits

102:02,116:16

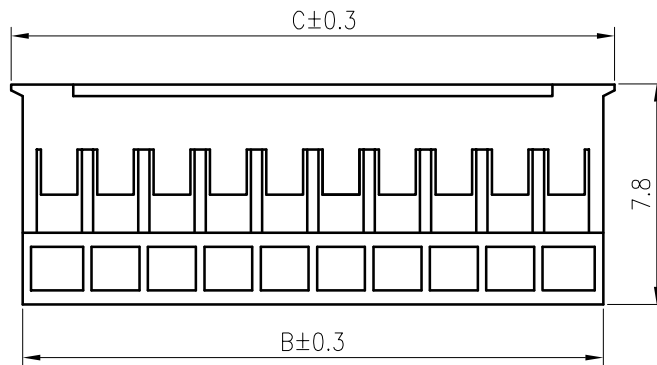

Circuits	Dimensions		
	A	B	C
2	2.00	4.60	5.60
3	4.00	6.60	7.60
4	6.00	8.60	9.60
5	8.00	10.60	11.60
6	10.00	12.60	13.60
7	12.00	14.60	15.60
8	14.00	16.60	17.60
9	16.00	18.60	19.60
10	18.00	20.60	21.60
11	20.00	22.60	23.60
12	22.00	24.60	25.60
13	24.00	26.60	27.60
14	26.00	28.60	29.60
15	28.00	30.60	31.60
16	30.00	32.60	33.60

△4				TOLERANCE	TITLE:	DRAWN: Arvin 2020.05.23	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.			
△3				X. X ±0.30	PH2.0带扣 Housing	CHECKED:				
△2	更改料号及图框格式	Arvin	2020.05.23	X. XX ±0.20 X. XXX ±0.10		APPROVED:		PART NO. : H2004MI060301A		
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	Angle ±2°	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A2	DRAWING NO. : 2004H101-A-S