

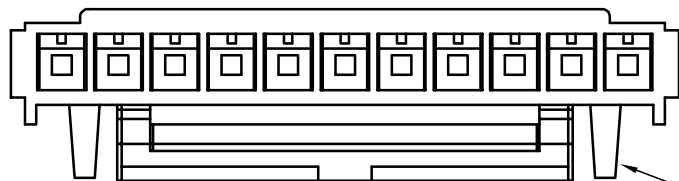

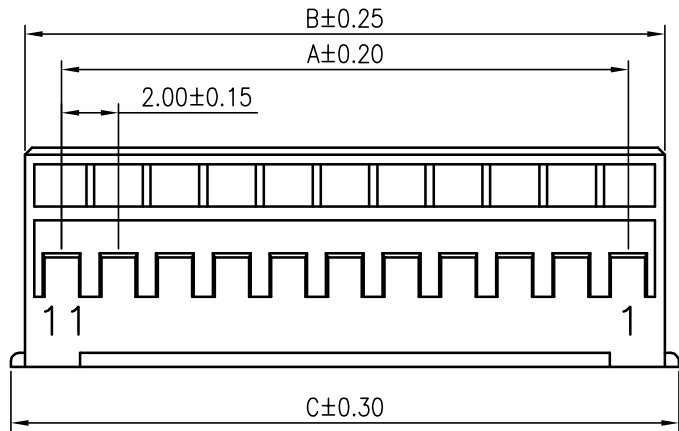


RoHS
COMPLIANT

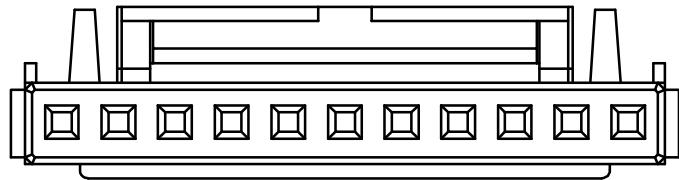

2P~10P无此凸块



2P

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: PA66 UL94 V-0
Suitable KR2004 series terminal
Mate With KR2004 series wafer

Ordering Code:

H20040 *** 01 01B

No. of Circuits

102:02,116:16

Circuits	Dimensions		
	A	B	C
2	2.00	4.70	5.70
3	4.00	6.70	7.70
4	6.00	8.70	9.70
5	8.00	10.70	11.70
6	10.00	12.70	13.70
7	12.00	14.75	15.75
8	14.00	16.75	17.75
9	16.00	18.75	19.75
10	18.00	20.75	21.75
11	20.00	22.75	23.75
12	22.00	24.75	25.75
13	24.00	26.75	27.75
14	26.00	28.75	29.75
15	28.00	30.75	31.75
16	30.00	32.75	33.75



MARK

REVISION	DESCRIPTION	SIGNATURE	DATE
1	更改料号及图框格式	Arvin	2021.03.01

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
PH2.0带扣 Housing
UNIT: mm SCALE: N/A

DRAWN: Arvin 2021.03.01
CHECKED:
APPROVED:
SHEET: 1/1 PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co., Ltd.
PART NO.: H2004M**0101B
REV.: A2 DRAWING NO.: 2004H101-B-S