
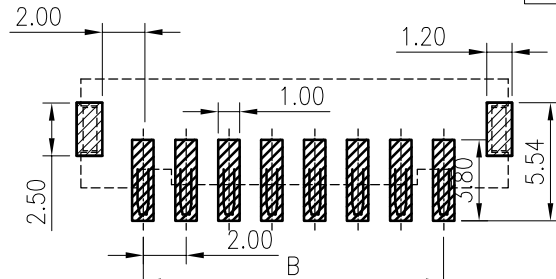
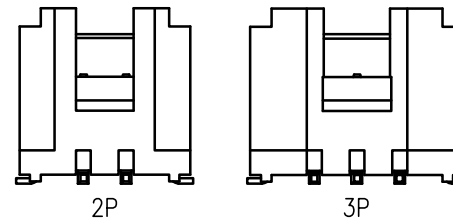

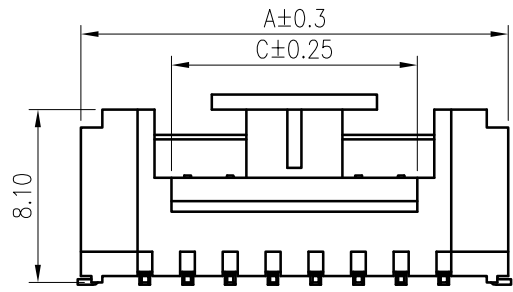
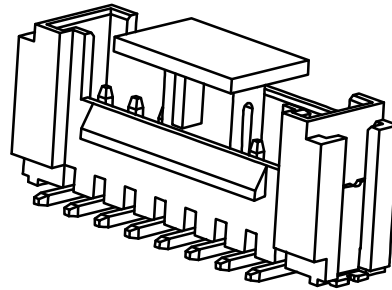


RoHS
COMPLIANT

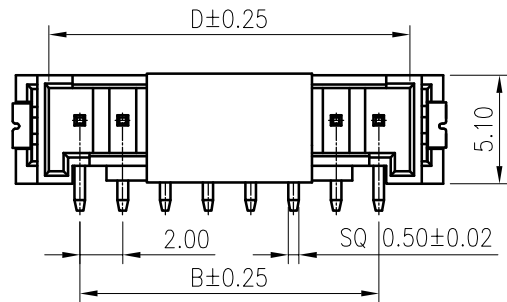

Recommended P.C.B. Layout
Total tolerance: ±0.05mm

0.12 Max

Ordering Code:

C2004VS *** 13 T01 01RC

No. of Circuits
102:02,116:16

Insulator Material
13:LCP Natural

Plating
T01: Tin plated

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material:

Insulator: LCP UL94 V-0
Contact: Brass
Solder tabs: Phosphor bronze
Plating: Tin Plated over nickel
Mate with KR2004 Series Housing

Circuits	Dimensions			
	A	B	C	D
2	8.00	2.00	2.70	4.90
3	10.00	4.00	2.70	6.90
4	12.00	6.00	3.50	8.90
5	14.00	8.00	5.50	10.90
6	16.00	10.00	7.50	12.90
7	18.00	12.00	9.50	14.90
8	20.00	14.00	11.50	16.90
9	22.00	16.00	13.50	18.90
10	24.00	18.00	15.50	20.90
11	26.00	20.00	15.50	22.90
12	28.00	22.00	15.50	24.90
13	30.00	24.00	15.50	26.90
14	32.00	26.00	15.50	28.90
15	34.00	28.00	15.50	30.90
16	36.00	30.00	15.50	32.90



MARK

1

2

3

4

5

6

7

8

9

TOLERANCE

X. X ±0.30
X. XX ±0.20
X. XXX ±0.10
Angle ±2°

TITLE:

PH2.0带扣 SMT 180°
Wafer

UNIT: mm

SCALE: N/A

DRAWN: Arvin 2020.04.30

CHECKED:

APPROVED:

SHEET: 1/1

PROJECTION

KONNRA 东莞市康瑞电子有限公司

DongGuan Konnra Electronics Co., Ltd.

PART NO.: C2004VS***13T0101RC

REV.: A2

DRAWING NO.: 2004WS101-C-S