
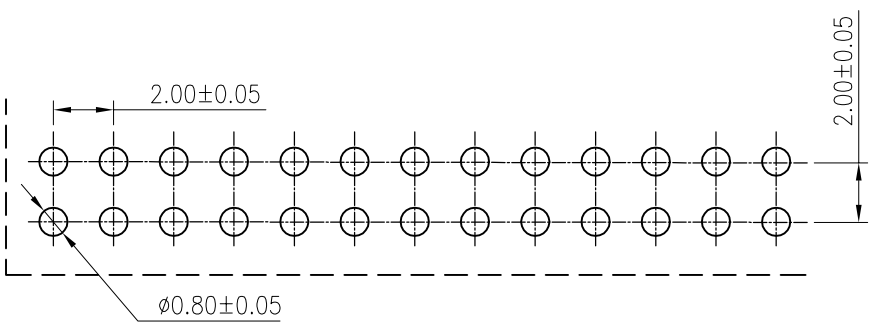

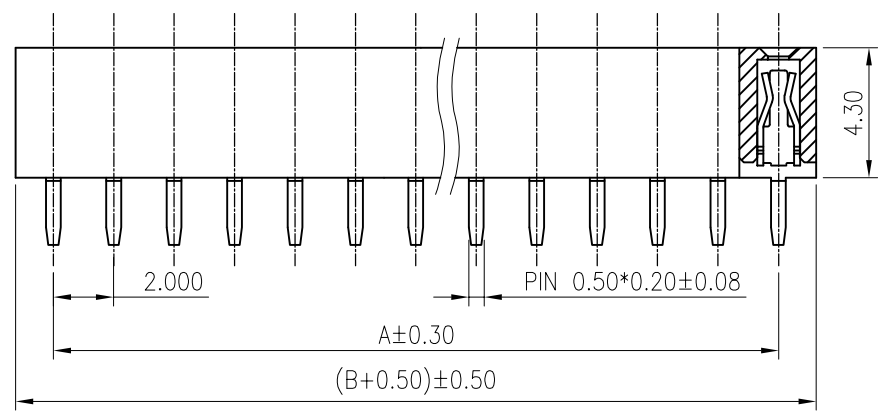


RoHS
COMPLIANT

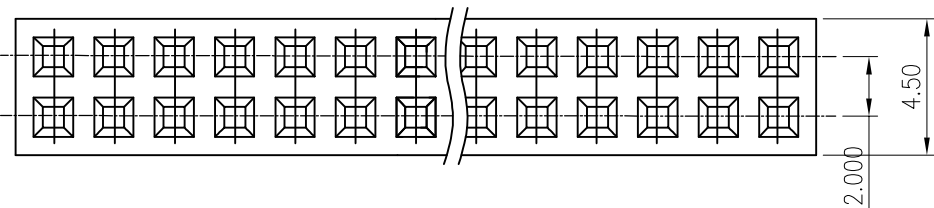

Recommended P.C.B Layout

SPECIFICATIONS

1. Current rating: 1A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material:

Insulator: PA9T UL 94V-0
Contact: Phosphor bronze
Plating: Gold flash over Nickel
Mate with KR2006 series Housing

Ordering Code:

C2006VD *** 12 G01 01 * A

No. of Circuits
202:2*2,240:2*40

Packing
B:Box
T:Tube

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2X2	2.00	4.00	2X22	42.00	44.00
2X3	4.00	6.00	2X23	44.00	46.00
2X4	6.00	8.00	2X24	46.00	48.00
2X5	8.00	10.00	2X25	48.00	50.00
2X6	10.00	12.00	2X26	50.00	52.00
2X7	12.00	14.00	2X27	52.00	54.00
2X8	14.00	16.00	2X28	54.00	56.00
2X9	16.00	18.00	2X29	56.00	58.00
2X10	18.00	20.00	2X30	58.00	60.00
2X11	20.00	22.00	2X31	60.00	62.00
2X12	22.00	24.00	2X32	62.00	64.00
2X13	24.00	26.00	2X33	64.00	66.00
2X14	26.00	28.00	2X34	66.00	68.00
2X15	28.00	30.00	2X35	68.00	70.00
2X16	30.00	32.00	2X36	70.00	72.00
2X17	32.00	34.00	2X37	72.00	74.00
2X18	34.00	36.00	2X38	74.00	76.00
2X19	36.00	38.00	2X39	76.00	78.00
2X20	38.00	40.00	2X40	78.00	80.00
2X21	40.00	42.00			

F	△4				TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: DP2.0 DIP 180° female header H4.3 双排	DRAWN: Arvin 2020.08.14		KONNRA 东莞市康瑞电子有限公司		
	△3						CHECKED:		DongGuan Konnra Electronics Co., Ltd.		
	△2						APPROVED:		PART NO.: C2006VD***12G0101*A		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV.: A2
	1	2	3	4	5	6	7	8	9		