

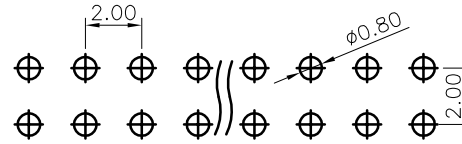
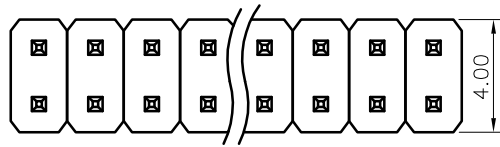


RoHS
COMPLIANT

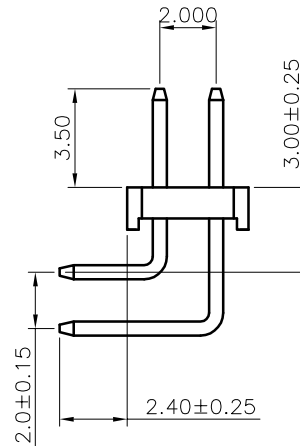

Recommended P.C.B. Layout
Total tolerance: ±0.05mm

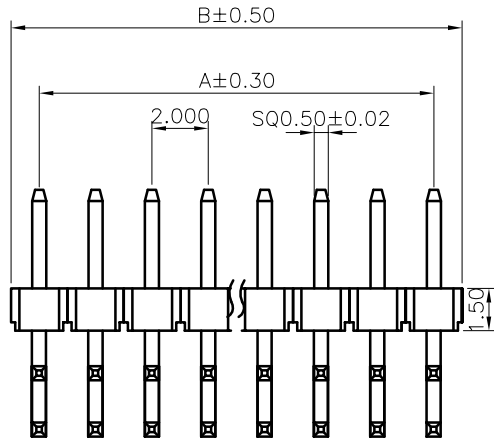

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material:

Insulator: PA6T UL 94V-0
Contact: Brass
Plating: Gold flash over Nickel
Circuits: 2*2~2*40
Mate with KR2006 series housing
A=2.00X(Circuits/2-1)
B=A+2.00

Ordering Code:

C2006RD *** 10 G01 03PA
No. of Circuits }
202:2x2, 240:2x40 }
Insulator Material }
10:PA6T Black }

F	△4				TOLERANCE	TITLE:	DRAWN: Arvin 2020.07.23	KONNRA 东莞市康瑞电子有限公司		
	△3				X. X ±0.30	DP2.0 DIP 90° 排	CHECKED:	DongGuan Konnra Electronics Co., Ltd.		
	△2	更改料号及图框格式	Arvin	2020.07.23	X. XX ±0.20	针 L=9.65/13.65	APPROVED:	PART NO.: C2006RD***10G0103PA		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X. XXX ±0.10	H1.5 平3.5 弯2.4	SHEET: 1/1	PROJECTION	REV.: A2	DRAWING NO.: 2006WWRD201-A-S
	1	2	3	4	5	6	7	8	9	