


RoHS
COMPLIANT

SPECIFICATIONS




1. Current rating: 2A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: PBT UL 94V-0
Suitable KR2007 series terminal
Mate with KR2007 series wafer
Ordering Code:

 H2007M *** 24 01B

No. of Circuits
102:2, 120:20
Insulator Material
24:PBT White

Circuits	Dimension	
	A	B
2	2.00	8.20
3	4.00	10.20
4	6.00	12.20
5	8.00	14.20
6	10.00	16.20
7	12.00	18.20
8	14.00	20.20
9	16.00	22.20
10	18.00	24.20
11	20.00	26.20
12	22.00	28.20
13	24.00	30.20
14	26.00	32.20
15	28.00	34.20
16	30.00	36.20
17	32.00	38.20
18	34.00	40.20
19	36.00	42.20
20	38.00	44.20

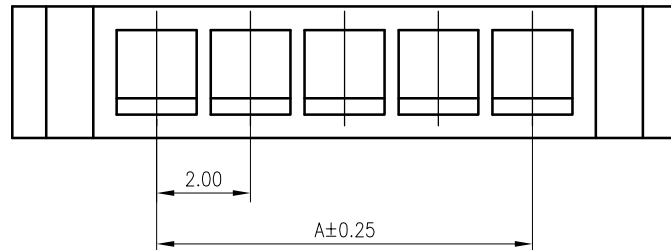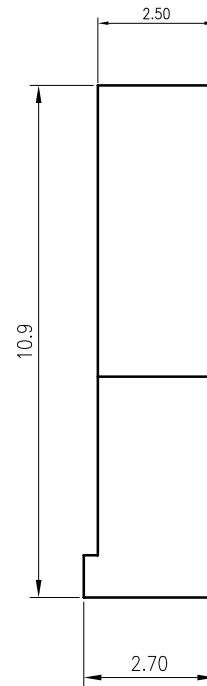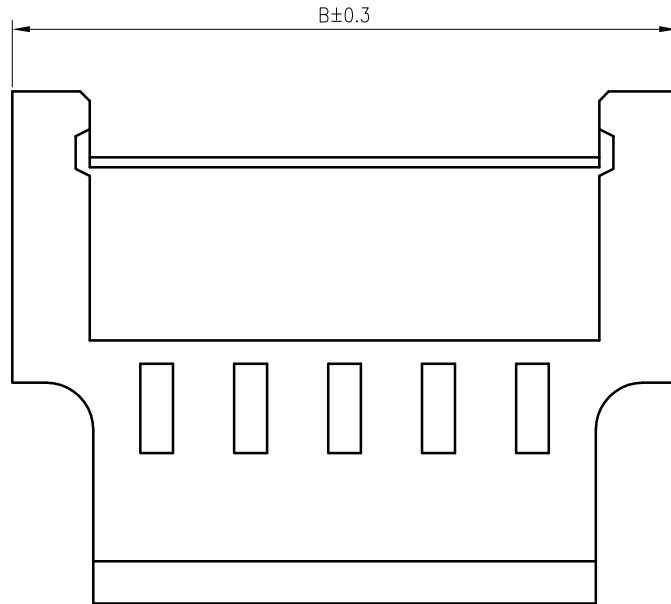

TOLERANCE

X. X ±0.30
X. XX ±0.20
X. XXX ±0.10
Angle ±2°

TITLE:
MX2.0空接 母
Housing


DRAWN: Liujiangtian 2020.04.29

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co., Ltd.

PART NO. : H2007F***2401B

MARK REVISION DESCRIPTION SIGNATURE DATE UNIT: mm SCALE: N/A SHEET: 1/1 PROJECTION  REV. : A2 DRAWING NO. : 2007HF101-B-S

1 2 3 4 5 6 7 8 9