



RoHS
COMPLIANT




SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: PA66 UL 94V-0
Suitable KR2007 series terminal
Mate with KR2007 series wafer
Ordering Code:

 H2007M *** 01 01C

No. of Circuits 
102:2, 116:16
Insulator Material
01:PA66 White 94V-0

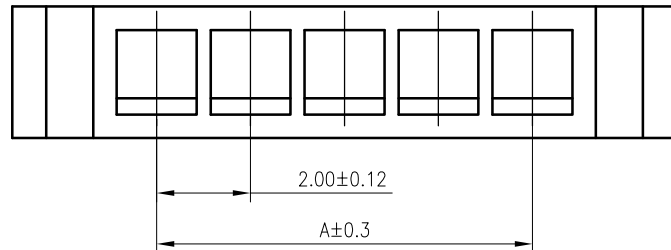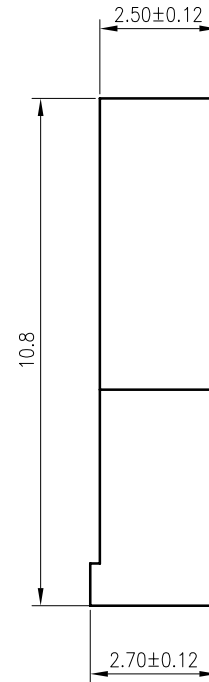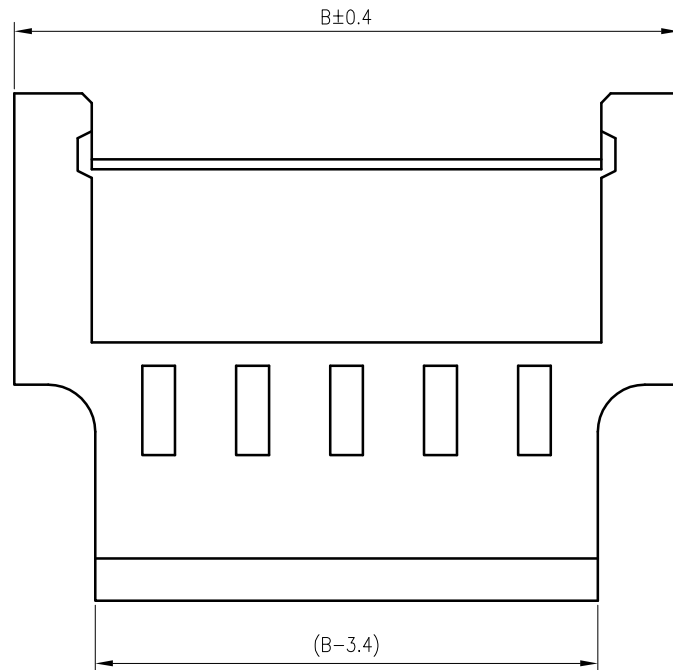

Circuits	Dimension	
	A	B
2	2.00	8.00
3	4.00	10.00
4	6.00	12.00
5	8.00	14.00
6	10.00	16.00
7	12.00	18.00
8	14.00	20.00
9	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00

TOLERANCE

X. X ± 0.30
X. XX ± 0.20
X. XXX ± 0.10
Angle ± 2°

TITLE:
MX2.0空接 母
Housing


DRAWN: Liujiangtian 2020.04.29

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co., Ltd.

PART NO. : H2007F***0101C

MARK REVISION DESCRIPTION SIGNATURE DATE UNIT: mm SCALE: N/A SHEET: 1/1 PROJECTION  REV. : A2 DRAWING NO. : 2007HF101-C-S

1 2 3 4 5 6 7 8 9