


RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.




Material: PBT UL 94V-0
Suitable KR2007 series terminal
Mate with KR2007 series wafer
Ordering Code:

 H2007M *** 24 01C

No. of Circuits

102:2,116:16

Insulator Material
24:PBT White

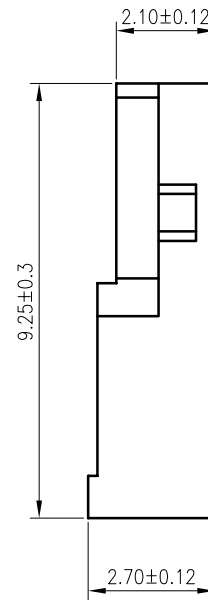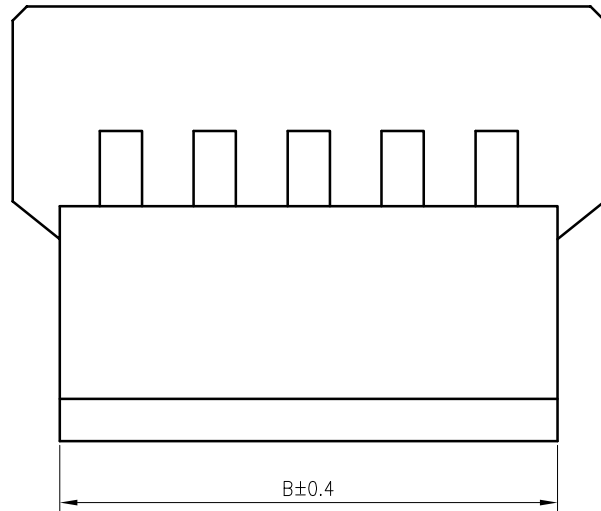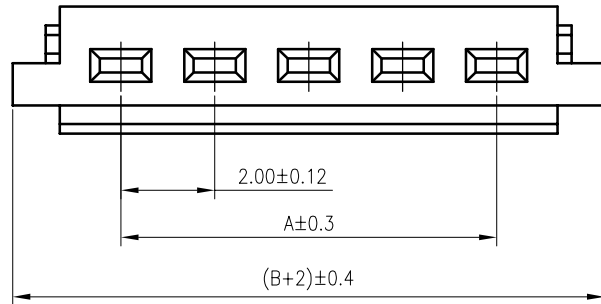

Circuits	Dimension	
	A	B
2	2.00	4.60
3	4.00	6.60
4	6.00	8.60
5	8.00	10.60
6	10.00	12.60
7	12.00	14.60
8	14.00	16.60
9	16.00	18.60
10	18.00	20.60
11	20.00	22.60
12	22.00	24.60
13	24.00	26.60
14	26.00	28.60
15	28.00	30.60
16	30.00	32.60

F					TOLERANCE	TITLE:	DRAWN: Liujiangtian 2020.04.29	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.		
		更改料号及图框格式	LJT	2020.04.29	X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°	MX2.0空接 公 Housing	CHECKED:	PART NO.: H2007M***2401C		
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION 	REV.: A2	DRAWING NO.: 2007HM01-C-S	
1	2	3	4	5	6	7	8	9		