
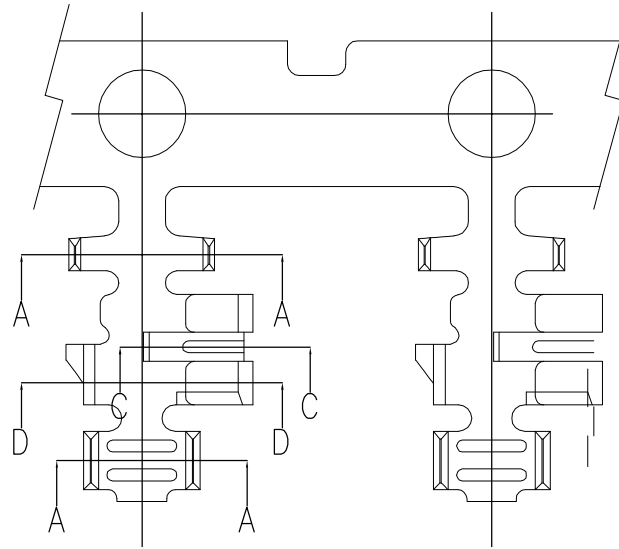


RoHS
COMPLIANT

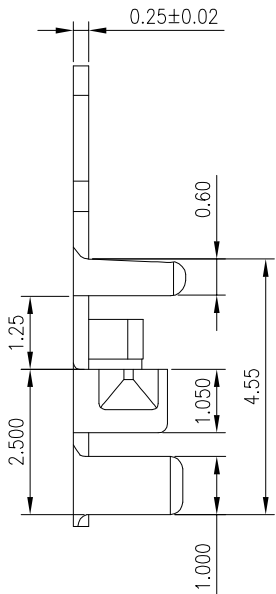

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Applicable Wires:

AWG#22~#26


Insulation O.D. : 1.50mm MAX

Material: Phosphor Bronze


Plating: Tin-Plated over nickel Suitable

KR2008 series housing


Q'ty/reel: 10,000 PCS




SECTION A-A



SECTION B-B



SECTION C-C



SECTION D-D

F	A3			TOLERANCE		TITLE:		DRAWN: Liujingtian 2020.05.04		KONNRA 东莞市康瑞电子有限公司	
				X. X ± 0.30	AMP2.0 Terminal		CHECKED:		DongGuan Konnra Electronics Co., Ltd.		
	A2	更改料号及图框格式	LJT	2020.05.04	X. XX ± 0.20			APPROVED:		PART NO. : T20080P***01B	
MARK	REVISION DESCRIPTION		SIGNATURE	DATE	X. XXX ± 0.10	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A2	DRAWING NO. : 2008T101-B-S
	1	2	3	4	5	6	7	8	9		