








**RoHS**  
COMPLIANT




8P Vi ew

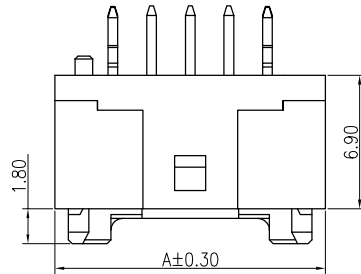



10P-15P Vi ew

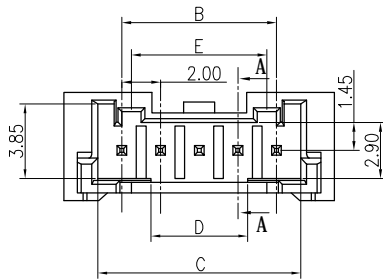


SECTION:A-A

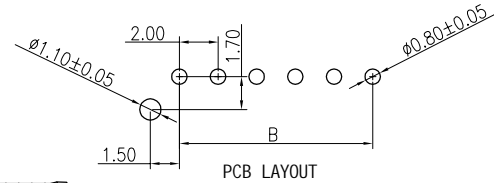


PCB LAYOUT



2P Vi ew



3P Vi ew



4P Vi ew

- ◆ SPECIFICATIONS
- Current rating: 3A (AWG #22)AC, DC
  - Voltage rating: 250V AC,DC
  - Temperature range: -40°C ~ +105°C
  - Insulation resistance: 1000MΩ Min.
  - Withstanding voltage: 800V AC/ minute.
  - Contact resistance: 20m Ω Max.

Material:  
 Insulator: Nylon 9T UL 94V-0  
 Pin: Brass  
 Plating: Tin plated over Nickel  
 Suitable: KR2014 series Housing  
 PART NO: C2014VD1\*\*11M0101PA   
 02: 2P  
 16: 16P  
 11: PA9T本色  
 M01: 雾锡  
 P: 袋装

15P	34.00	28.00	30.50	23.00	13.60
14P	32.00	26.00	28.50	21.00	13.60
13P	30.00	24.00	26.50	19.00	13.60
12P	28.00	22.00	24.50	17.00	13.60
11P	26.00	20.00	22.50	15.00	13.60
10P	24.00	18.00	20.50	13.00	13.60
9P	22.00	16.00	18.50	11.00	7.00
8P	20.00	14.00	16.50	9.00	7.00
7P	18.00	12.00	14.50	7.00	7.00
6P	16.00	10.00	12.50	5.00	7.00
5P	14.00	8.00	10.50	5.00	7.00
4P	12.00	6.00	8.50	5.00	---
3P	10.00	4.00	6.50	1.00	---
2P	8.00	2.00	4.50	---	---
PIN数	A	B	C	D	E

F					TOLERANCE	TITLE:	DRAWN: ru yi 2020.03.10	KONNRA 东莞市康瑞电子有限公司		
		更改料号及图框格式	Ru yi	2020.3.10	X. X ±0.30	PA2.0 DIP 180° WF	CHECKED:	DongGuan Konnra Electronics Co., Ltd.		
		新发行	Ru yi	2018.12.13	X. XX ±0.25		APPROVED:	PART NO. : C2014VD1**11M0101PA		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X. XXX ±0.10		UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION
	1	2	3	4	5	6	7	8	9	