





**RoHS**  
COMPLIANT






- ◆SPECIFICATIONS
- Current rating: 3A (AWG #22)AC, DC
  - Voltage rating: 250V AC,DC
  - Temperature range: -40°C ~ +105°C
  - Insulation resistance:1000MΩ Min.
  - Withstanding voltage: 800V AC/ minute.
  - Contact resistance: 20mΩ Max.



Material:  
Insulator: Nylon 9T UL 94V-0  
Pin: Brass  
Plating: Tin plated over Nickel  
Suitable: KR2014 series Housing

PART NO: C2014VS \*\*\*\*11M0101RA   
102: 2P  
116: 16P  
11: PA9T本色  
M01: 雾锡  
R: 卷装


Recommended P.C.B. Layout  
Total tolerance:±0.05mm

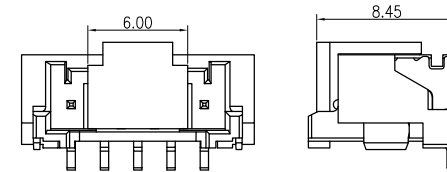



加盖示意图




SECTION:A-A

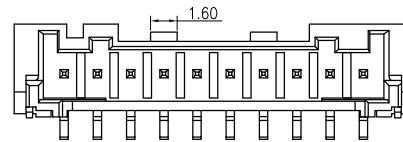


10-15P两个卡扣 视图



2P 视图



3P 视图



4P 视图

15P	34.00	28.00	30.50
14P	32.00	26.00	28.50
13P	30.00	24.00	26.50
12P	28.00	22.00	24.50
11P	26.00	20.00	22.50
10P	24.00	18.00	20.50
9P	22.00	16.00	18.50
8P	20.00	14.00	16.50
7P	18.00	12.00	14.50
6P	16.00	10.00	12.50
5P	14.00	8.00	10.50
4P	12.00	6.00	8.50
3P	10.00	4.00	6.50
2P	8.00	2.00	4.50
PIN数	A	B	C



MARK

REVISION DESCRIPTION

SIGNATURE

DATE

TOLERANCE

X. X ±0.30

X. XX ±0.25

X. XXX ±0.10

Angle ±2°

TITLE:

PA2.0 SMT 180° WF

UNIT: mm

SCALE: N/A

DRAWN: ru yi 2020.03.10

CHECKED:

APPROVED:

SHEET: 1/1

PROJECTION 

**KONNRA** 东莞市康瑞电子有限公司  
DongGuan Konnra Electronics Co., Ltd.

PART NO.: C2014VS\*\*\*\*11M0101RA

REV.: A2 DRAWING NO.: 2014WVFS01-A-S

1

2

3

4

5

6

7

8

9