


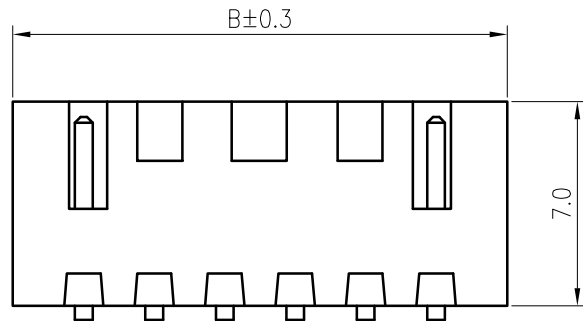


RoHS
COMPLIANT

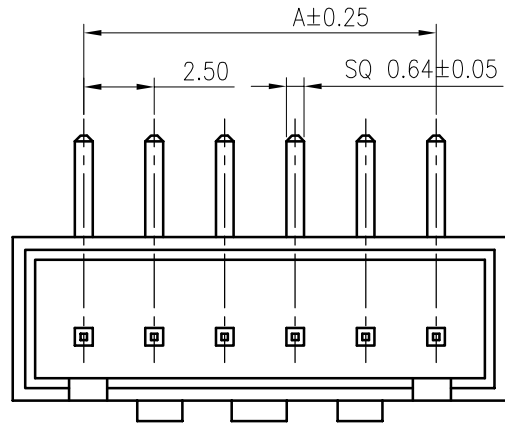

Recommended P.C.B. Layout
Total tolerance: ±0.05mm

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC, DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/ min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material:

Insulator: PA66 UL94 V-2 or v-0
Contact: Brass
Plating: Tin plated over Nickel
Mate with KR2502 series Housing

Ordering Code:

C2502RD xxx 01 T01 01PB
No. of Circuits | Plating
102:02,116:16 | T01: Tin plated
Insulator Material
03: PA66 White V2
20: PA66 Red V0
21: PA66 Blue V0
22: PA66 Beige V0
31: PA66 Green V0

Circuits	Dimensions		Circuits	Dimensions	
	A	B		A	B
2	2.50	7.50	10	22.50	27.50
3	5.00	10.00	11	25.00	30.00
4	7.50	12.50	12	27.50	32.50
5	10.00	15.00	13	30.00	35.00
6	12.50	17.50	14	32.50	37.50
7	15.00	20.00	15	35.00	40.00
8	17.50	22.50	16	37.50	42.50
9	20.00	25.00	18	42.50	47.50

F					TOLERANCE X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°	TITLE: XH2.5带扣 DIP 90° Wafer	DRAWN: Arvin 2020.05.29		KONNRA 东莞市康瑞电子有限公司	
		更改料号及图框格式	Arvin	2020.05.29			CHECKED:		DongGuan Konnra Electronics Co., Ltd.	
		增加料号颜色说明	Arvin	2018.06.29			APPROVED:		PART NO.: C2502RDxxxxxT0101PB	
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION