



RoHS
COMPLIANT


SPECIFICATIONS

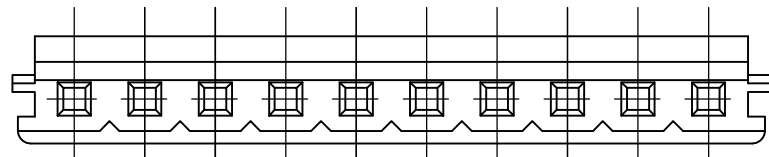

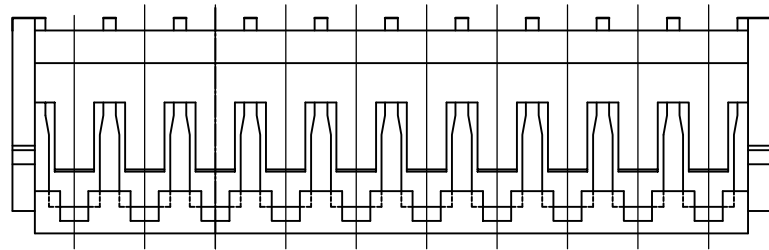
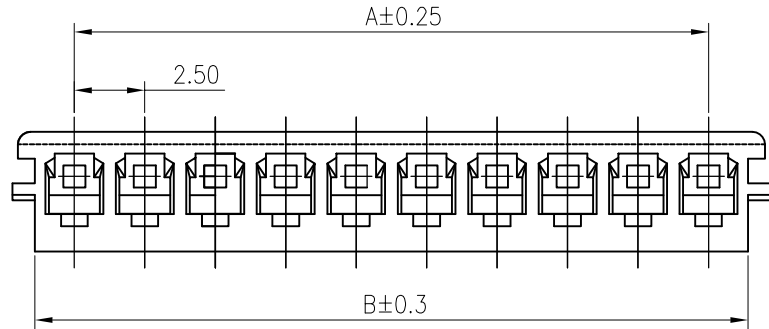
1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: Nylon66 UL94 V-0
Suitable KR2504 series terminal
Mate with KR2504 series wafer
Ordering Code:




 H25040 *** 01 01A

No. of Circuits 
102:2,116:16

Insulator Material 
01:PA66 White V0



Circuits	Dimension	
	A	B
2	2.50	5.40
3	5.00	7.90
4	7.50	10.40
5	10.00	12.90
6	12.50	15.40
7	15.00	17.90
8	17.50	20.40
9	20.00	22.90
10	22.50	25.40
11	25.00	27.90
12	27.50	30.40
13	30.00	32.90
14	32.50	35.40
15	35.00	37.90
16	37.50	40.40

F					TOLERANCE	TITLE: EH2.5 Housing	DRAWN: Liujingtian 2020.5.05		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.	
		更改料号及图框格式	LJT	2020.05.05	X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°		UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION 
MARK	REVISION DESCRIPTION	SIGNATURE	DATE						REV.: A2	DRAWING NO.: 2504H101-A-S
1	2	3	4	5	6	7	8	9		