

1 2 3 4 5 6 7 8 9

A

B

C

D

E

A

B



C

D

E

F



F

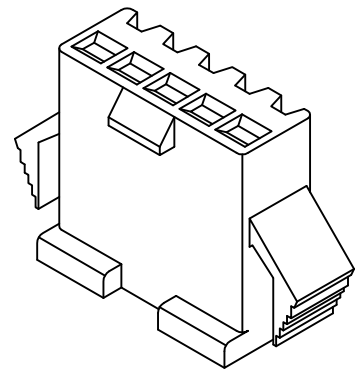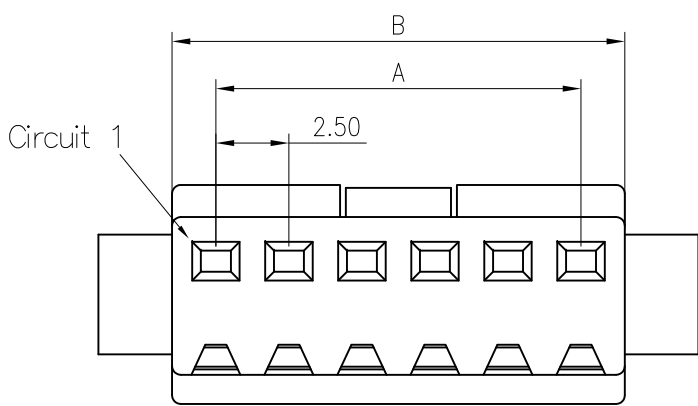

- ◆ SPECIFICATIONS
- Current rating: 3A AC, DC
  - Voltage rating: 250V AC, DC
  - Temperature range: -25°C ~ +85°C
  - Insulation resistance: 500MΩ Min.
  - Withstanding voltage: 1500V AC/ minute.
  - Contact resistance: 10mΩ Max.

Material: Nylon 66 UL 94V-2  
 Suitable: KR2507 series female terminal  
 Mate: KR2507 series female Housing

A2507F\*\*\*5\*P6\*  
 0:NONE  
 G:无卤  
 0:黑色  
 9:白色  
 PIN数

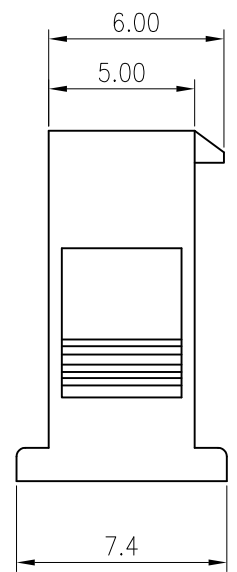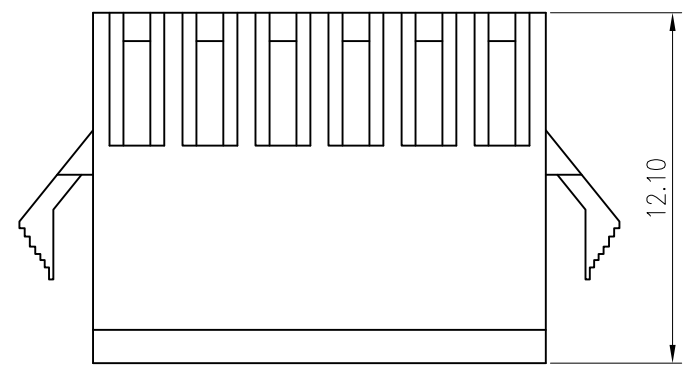

Part No.	Dimension mm (in)	
	A	B
A2507F0025*P60	2.50	5.50
A2507F0035*P60	5.00	8.00
A2507F0045*P60	7.50	10.50
A2507F0055*P60	10.00	13.00
A2507F0065*P60	12.50	15.50
A2507F0075*P60	15.00	18.00
A2507F0085*P60	17.50	20.50
A2507F0095*P60	20.00	23.00
A2507F0105*P60	22.50	25.50
A2507F0115*P60	25.00	28.00
A2507F0125*P60	27.50	30.50

△4				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE:		
△3				.X±0.30	X°±1°	DRAWN: 朱佑武	JST SM 2.5 公 Housing		
△2				.XX±0.20	.X°±	CHECKED:	VER. SCALE: N/A		
△1				.XXX±0.10	.XX°±	APPROVED:	A SHEET: 1/1		
LTR	NAME	DATE	VERISION RECORD						

**东莞市康瑞电子有限公司**  
 Dongguan Konnra Electronics co., LTD.

PROJECTION	PART NO.	A2507F***5*P60	
	DRAWING NO.	2507HM01-5-S	

1 2 3 4 5 6 7 8 9