
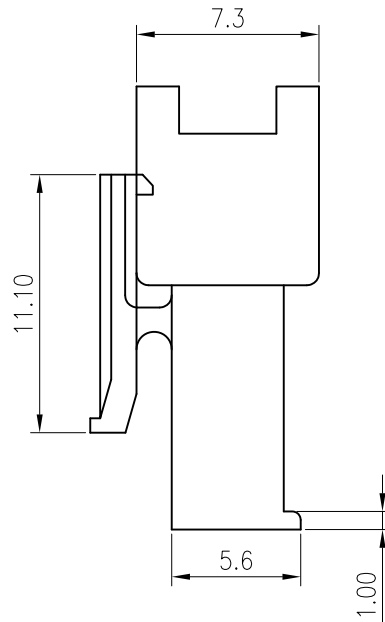


◆ SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 500MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 10mΩ Max.

Material: Nylon 66 UL 94V-2
 Suitable: KR2507 series male terminal
 Mate: KR2507 series male Housing


A2570M***5*P60
 0: 黑色
 9: 白色
 PIN数

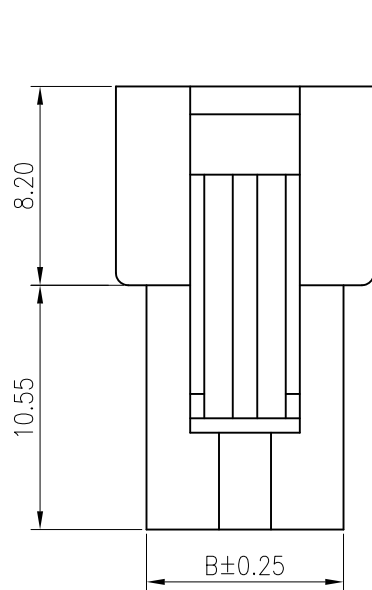

Part No.	Dimension mm (in)		
	A	B	C
A2507M0025*P61	2.50	5.60	8.00
A2507M0035*P61	5.00	8.10	10.50
A2507M0045*P61	7.50	10.60	13.00
A2507M0055*P61	10.00	13.10	15.50
A2507M0065*P61	12.50	15.60	18.00
A2507M0075*P61	15.00	18.10	20.50
A2507M0085*P61	17.50	20.60	23.00
A2507M0095*P61	20.00	23.10	25.50
A2507M0105*P61	22.50	25.60	28.00
A2507M0115*P61	25.00	28.10	30.50
A2507M0125*P61	27.50	30.60	33.00

④				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE:		
③				.X ± 0.30	X° ± 1°	DRAWN: 朱佑武	JST SM 2.5 母 Housing		
②				.XX ± 0.20	.X° ±	CHECKED:	2012.10.18		
①				.XXX ± 0.10	.XX° ±	APPROVED:	VER.	SCALE:	N/A
LTR	NAME	DATE	VERSION RECORD				A	SHEET:	1/1


东莞市康瑞电子有限公司
 Dongguan Konnra Electronics co., LTD.

PROJECTION:  PART NO. **A2507M***5*P60**

DRAWING NO. **2507HF01-5-S**

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

1 2 3 4 5 6 7 8 9