


RoHS
COMPLIANT

SPECIFICATIONS

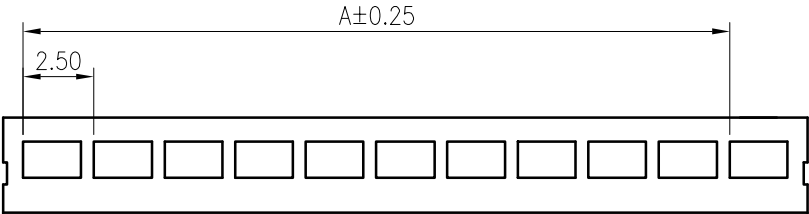

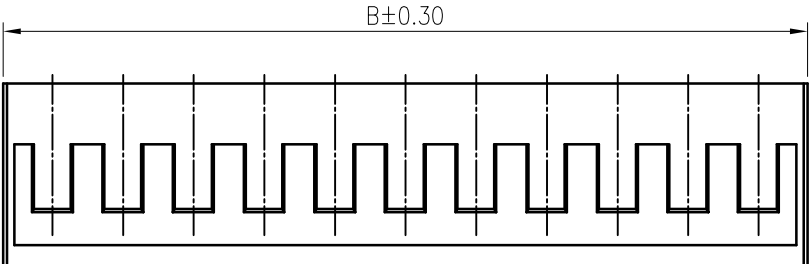


- 1. Current rating: 3A AC, DC
- 2. Voltage rating: 250V AC,DC
- 3. Temperature range: -40°C ~ +105°C
- 4. Insulation resistance: 1000MΩ Min.
- 5. Withstanding voltage: 800V AC/ minute.
- 6. Contact resistance: 10mΩ Max.

Material: Nylon 66 UL 94V-0
 Suitable KR2508 series terminal
 Mate with KR2508 series wafer
 Ordering Code:




 H2508R *** 01 **B

No. of Circuits
 102:2,116:16

Insulator Material
 01:PA66 White V0



Circuits	Dimensions	
	A	B
2	2.50	6.00
3	5.00	8.50
4	7.50	11.00
5	10.00	13.50
6	12.50	16.00
7	15.00	18.50
8	17.50	21.00
9	20.00	23.50
10	22.50	26.00
11	25.00	28.50
12	27.50	31.00
13	30.00	33.50
14	32.50	36.00
15	35.00	38.50
15	37.50	41.00

F					TOLERANCE	TITLE:	DRAWN: Arvin 2020.10.30	KONNRA 东莞市康瑞电子有限公司		
		更改料号及图框格式	LJT	2020.05.06	X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°	SCN2.5 90° Housing	CHECKED:	DongGuan Konnra Electronics Co., Ltd.		
MARK	REVISION DESCRIPTION	SIGNATURE	DATE		UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION 	REV.: A2	DRAWING NO.: 2508HR101-B-S
1	2	3	4	5	6	7	8	9		