




RoHS
COMPLIANT



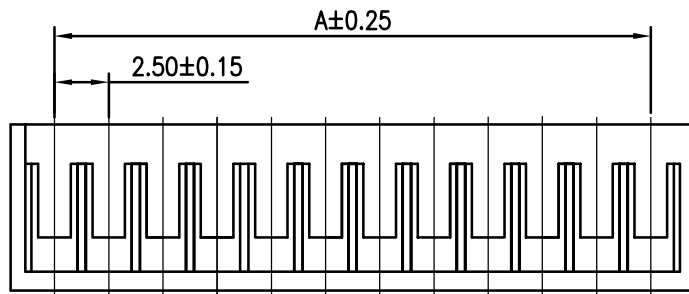
SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 10mΩ Max.




Material: Nylon 66 UL 94V-0
 Suitable KR2508 series terminal
 Mate with KR2508 series wafer
 Ordering Code:

 H2508V *** 01 01B

No.of Circuits 
 102:2,116:16
 Insulator Material 
 01:PA66 White V0



Circuits	Dimensions	
	A	B
2	2.50	6.50
3	5.00	9.00
4	7.50	11.50
5	10.00	14.00
6	12.50	16.50
7	15.00	19.00
8	17.50	21.50
9	20.00	24.00
10	22.50	26.50
11	25.00	29.00
12	27.50	31.50
13	30.00	34.00
14	32.50	36.50
15	35.00	39.00
15	37.50	41.50

F					TOLERANCE	TITLE: SCN2.5 180° Housing	DRAWN: Liujingtian 2020.5.06		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co., Ltd.	
		更改料号及图框格式	LJT	2020.05.06	X. X ±0.30 X. XX ±0.20 X. XXX ±0.10 Angle ±2°		CHECKED:		PART NO. : H2508V***0101B	
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION 	REV. : A2	DRAWING NO. : 2508HV101-B-S	
1	2	3	4	5	6	7	8	9		