

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 800V AC/ minute.
6. Contact resistance: 10mΩ Max.

Applicable Wires:

AWG#22~#28

Insulation O.D. : 1.60mm MAX



Material: Brass

Plating: Tin plated over nickel


Suitable KR2508 series housing

Q'ty/reel: 10,000PCS


"*"表示重点管控尺寸

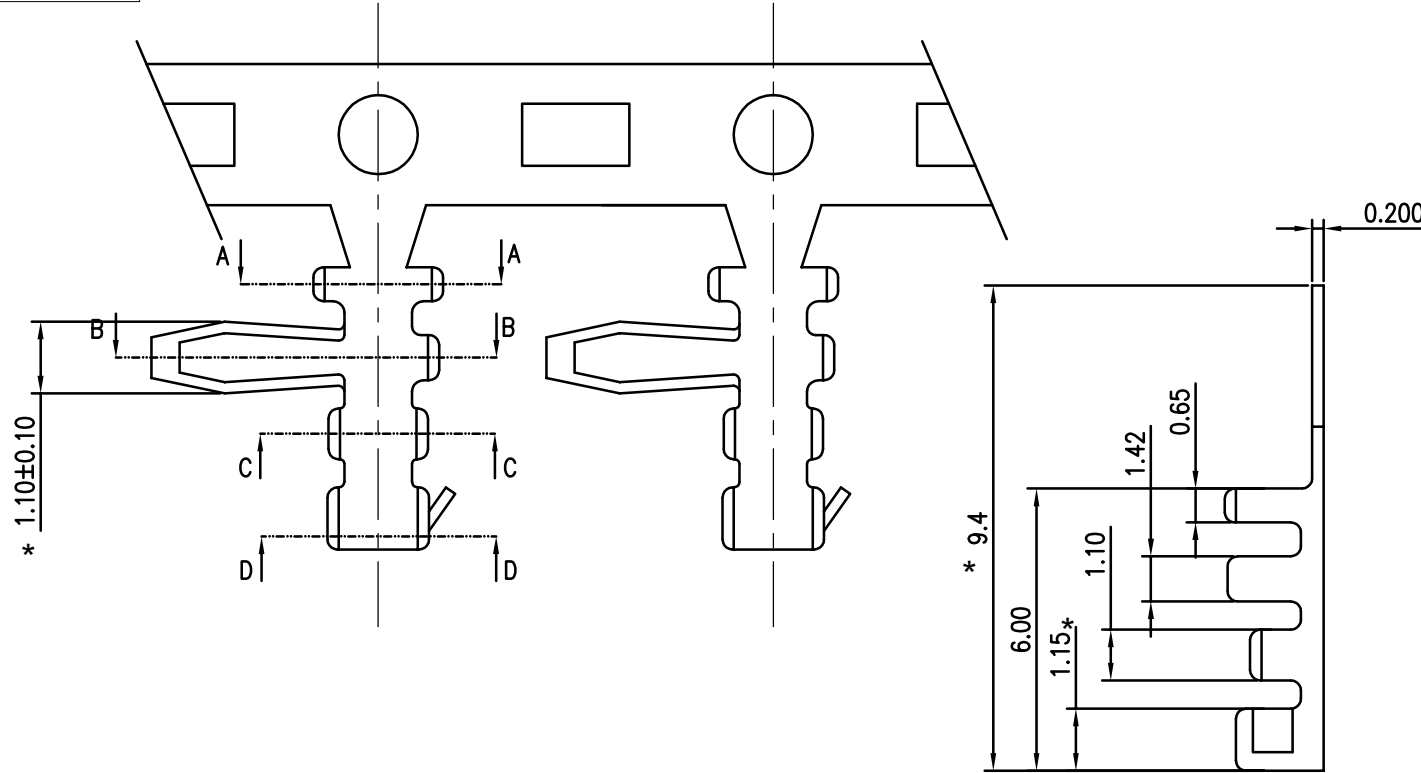


A-A SECTION

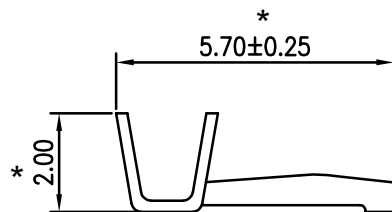

B-B SECTION



C-C SECTION

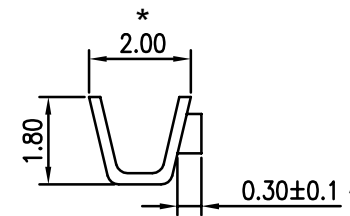

D-D SECTION

F				TOLERANCE	TITLE: SCN2.5 90° Terminal	DRAWN: Liujiangtian 2020.5.06		KONNRA 东莞市康瑞电子有限公司	
		更改料号及图框格式	LJT	2020.05.06		CHECKED:		DongGuan Konnra Electronics Co., Ltd.	
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	Angle $\pm 2^\circ$	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	PART NO.: T2508RBT0101B
	1	2	3	4	5	6	7	8	9