



RoHS
COMPLIANT

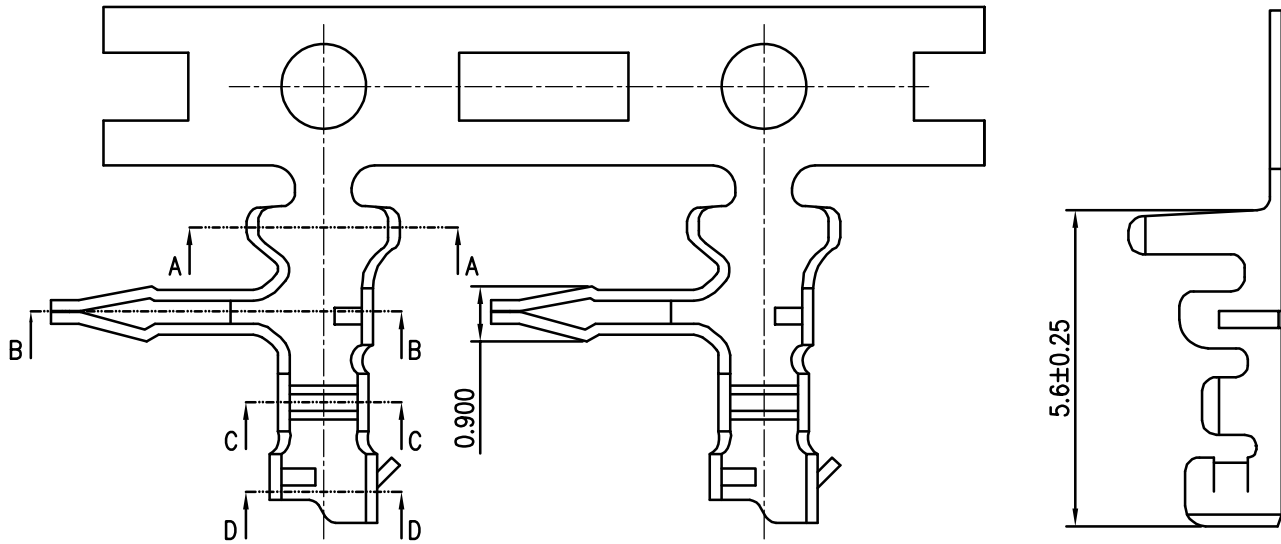


- SPECIFICATIONS**
1. Current rating: 3A AC, DC
 2. Voltage rating: 250V AC,DC
 3. Temperature range: -40°C ~ +105°C
 4. Insulation resistance: 1000MΩ Min.
 5. Withstanding voltage: 800V AC/ minute.
 6. Contact resistance: 10mΩ Max.

Applicable Wires:
AWG#24~#28
Insulation O.D. : 1.60mm MAX
Material: Phosphor bronze
Plating: Tin plated over nickel
Suitable KR2508 series housing
Q'ty/reel: 10,000PCS

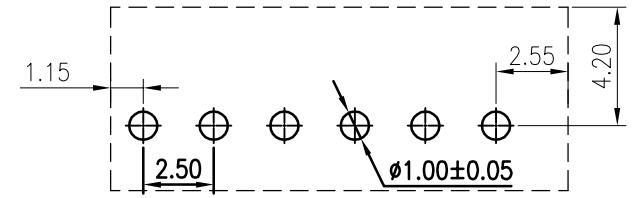

Recommended P.C.Board Layout

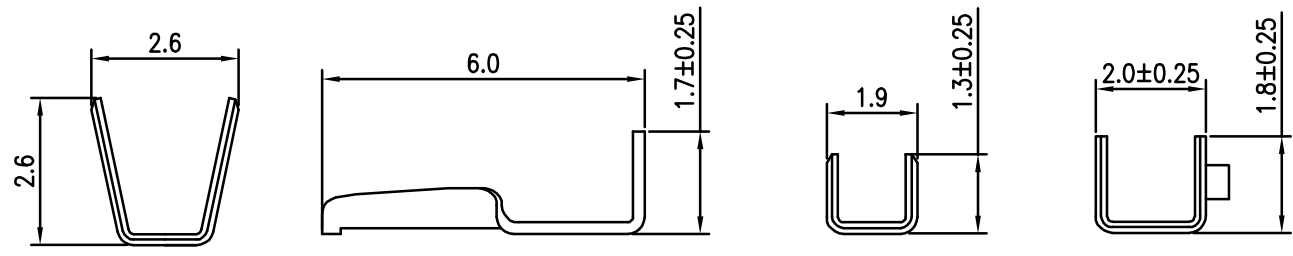

SECTION A-A SECTION B-B SECTION C-C SECTION D-D

F					TOLERANCE X. X ± 0.30 X. XX ± 0.20 X. XXX ± 0.10 Angle ± 2°	TITLE: SCN2.5 90° Terminal	DRAWN: Liujiangtian 2020.5.06		KONNRA 东莞市康瑞电子有限公司		
		增加P. C. B Layout	Arvin	2020.10.30			CHECKED:		DongGuan Konnra Electronics Co., Ltd.		
		更改料号及图框格式	LJT	2020.05.06			APPROVED:		PART NO. : T2508RPT0101C		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE			UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A3
	1	2	3	4		5	6	7	8	9	