

RoHS  
COMPLIANT

**SPECIFICATIONS**

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.





Material: PBT UL 94V-0  
Suitable KR2546 series terminal  
Mate with KR2546 series wafer

Ordering Code:

H25460 \*\*\* 05 01A

No. of Circuits  $\left\{ \begin{array}{l} \text{---} \\ \text{---} \end{array} \right.$   
202:2\*2,232:2\*32

Insulator Material  $\left\{ \begin{array}{l} \text{---} \\ \text{---} \end{array} \right.$   
05:PBT Black V0

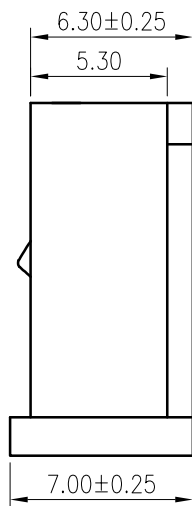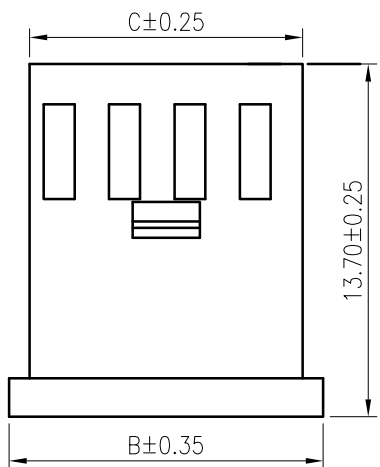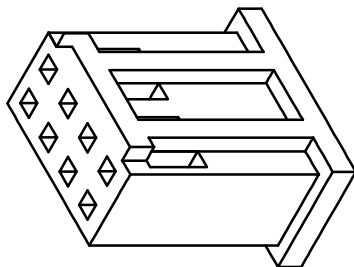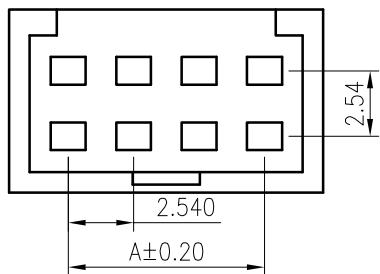

Circuits	Dimensions			Circuits	Dimensions		
	A	B	C		A	B	C
2x2	2.54	7.12	5.52	2x13	30.48	35.06	33.46
2x3	5.08	9.66	8.06	2x14	33.02	37.60	36.00
2x4	7.62	12.20	10.60	2x15	35.56	40.14	38.54
2x5	10.16	14.74	13.14	2x16	38.10	42.68	41.08
2x6	12.70	17.28	15.70	2x17	40.64	45.22	43.62
2x7	15.24	19.82	18.22	2x18	43.18	47.76	46.16
2x8	17.78	22.36	20.76	2x19	45.72	50.30	48.70
2x9	20.32	24.90	23.30	2x20	48.26	52.84	51.24
2x10	22.86	27.44	25.84	2x21	50.80	55.38	53.78
2x11	25.40	29.98	28.38	2x32	78.74	83.32	81.72
2x12	27.94	32.52	30.92				



MARK

REVISION	DESCRIPTION	SIGNATURE	DATE
A4			
A3			
A2	更改料号及图框格式	LJT	2020.05.20

**TOLERANCE**  
X. X ±0.30  
X. XX ±0.20  
X. XXX ±0.10  
Angle ±2°

**TITLE:**  
2.54 Pitch 双排  
Housing

UNIT: mm SCALE: N/A

**DRAWN:** Liujingtian 2020.5.20

**CHECKED:**

**APPROVED:**

SHEET: 1/1 PROJECTION

**KONNRA** 东莞市康瑞电子有限公司  
DongGuan Konnra Electronics Co., Ltd.

PART NO.: H25460\*\*\*0501A

REV.: A2 DRAWING NO.: 2546H201-A-S