


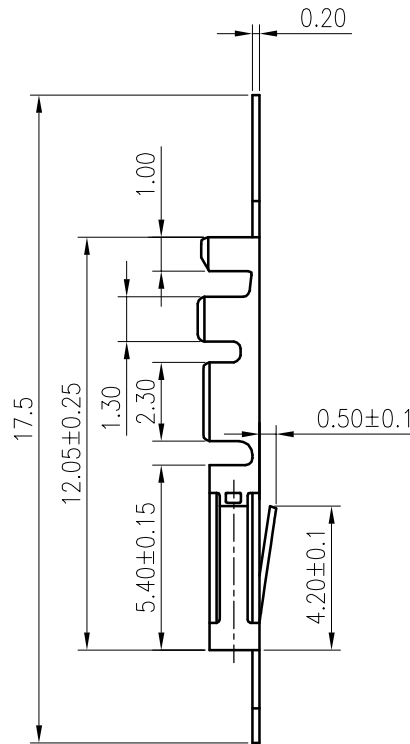



RoHS
COMPLIANT

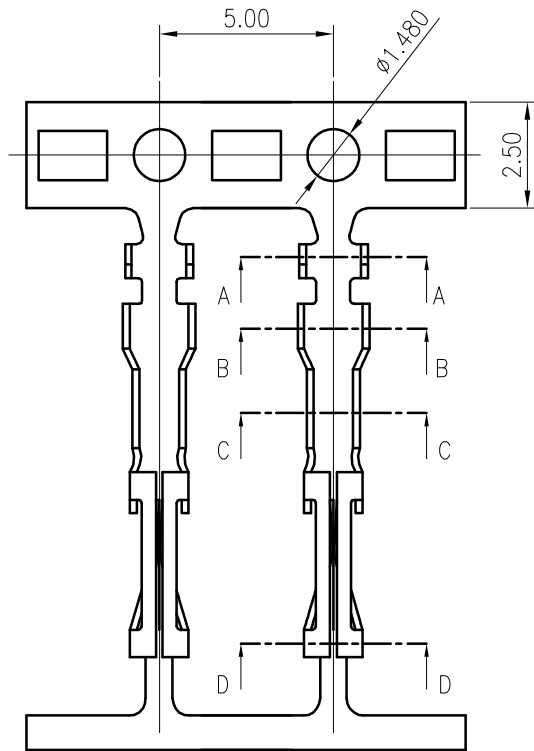


SEC:A-A



SEC:B-B



SEC:C-C



SEC:D-D

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Voltage rating: 250V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 20mΩ Max.

Applicable Wires:

AWG#22~#30

Insulation O.D. : 1.55mm MAX

Material: Phosphor Bronze

Plating: Tin plated over nickel

Suitable KR2546 series housing

Q'ty/reel: 15,000 PCS

△4				TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: 2.54 Pitch Terminal 双料带	DRAWN: Liujiangtian 2020.5.20		KONNRA 东莞市康瑞电子有限公司	
△3			CHECKED:			DongGuan Konnra Electronics Co., Ltd.			
△2	更改料号及图框格式	LJT	2020.05.20			APPROVED:		PART NO. : T2546FPT0102A	
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	UNIT: mm	SCALE: N/A	SHEET: 1/1	PROJECTION	REV. : A2	DRAWING NO. : 2546T102-A-S