
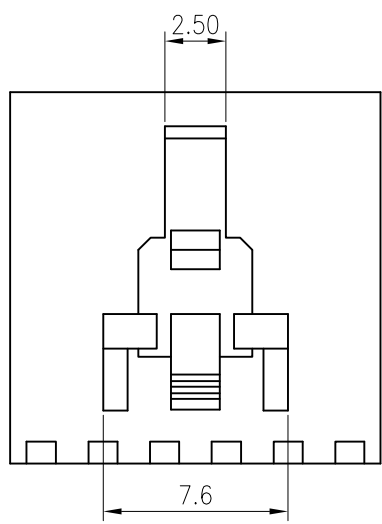
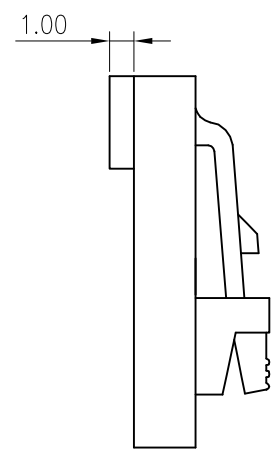


2 Circuits

- ◆ SPECIFICATIONS
- Current rating: 3A AC, DC
 - Voltage rating: 250V AC,DC
 - Temperature range: -25°C ~ +85°C
 - Insulation resistance: 1000MΩ Min.
 - Withstanding voltage: 600V AC/ minute.
 - Contact resistance: 20mΩ Max.

Material: Nylon 66 UL 94V-0
Circuits: 2~20

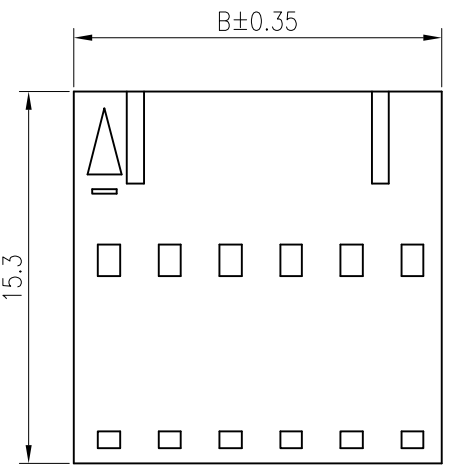

PART No.	Dimension mm	
	A	B
A2541G00250P60	2.54	5.08
A2541G00350P60	5.08	7.62
A2541G00450P60	7.62	10.16
A2541G00550P60	10.16	12.70
A2541G00650P60	12.70	15.24
A2541G00750P60	15.24	17.78
A2541G00850P60	17.78	20.32
A2541G00950P60	20.32	22.86
A2541G01050P60	22.86	25.40
A2541G01150P60	25.40	27.94
A2541G01250P60	27.94	30.48
A2541G01350P60	30.48	33.02
A2541G01450P60	33.02	35.56
A2541G01550P60	35.56	38.10
A2541G01650P60	38.10	40.64
A2541G01750P60	40.64	43.18
A2541G01850P60	43.18	45.72
A2541G01950P60	45.72	48.26
A2541G02050P60	48.26	50.80

△				GENERAL TOLERANCE		UNIT: mm		DATE		TITLE:		
△				.X±0.30	X°±1°	DRAWN:	朱佑武	2013.12.14		Molex 2.54 超薄带扣公Housing		
△				.XX±0.20	.X°±	CHECKED:				VER.	SCALE:	N/A
△				.XXX±0.10	.XX°±	APPROVED:				A	SHEET:	1/1
LTR	NAME	DATE	VERISION RECORD									

东莞市康瑞电子有限公司
Dongguan Konnra Electronics co., LTD.

PROJECTION	PART NO.	A2541G***50P60	
	DRAWING NO.	2541HM01-5-S	