


2*5P以下公差为±0.25
2*5P以上公差为±0.35

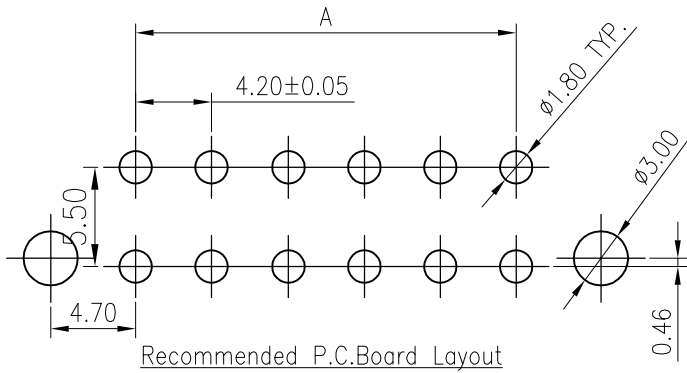


Recommended P.C.Board Layout


◆ SPECIFICATIONS

- Current rating: 9A AC, DC(AWG#16,2 Circuit)
- Voltage rating: 600V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 10mΩ Max.

Material:
Insulator: Nylon 66 UL 94V-2
Contact: Brass
Plating: Tin plated over Nickel
Circuits: 2*1~2*12P

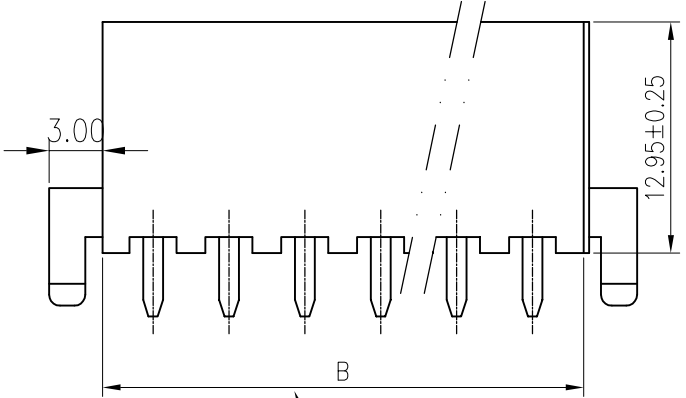

2*5P以下公差为±0.30
2*5P以上公差为±0.40

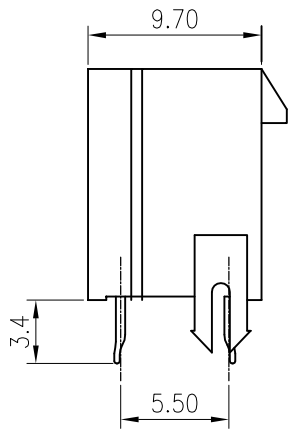

Dimension

PART NO	A	B
C4200VD20113P64AK		5.60
C4200VD20213P64AK	4.20	9.80
C4200VD20313P64AK	8.40	14.00
C4200VD20413P64AK	12.60	18.20
C4200VD20513P64AK	16.80	22.40
C4200VD20613P64AK	21.00	26.60
C4200VD20713P64AK	25.20	30.80
C4200VD20813P64AK	29.40	35.00
C4200VD20913P64AK	33.60	39.20
C4200VD21013P64AK	37.80	43.40
C4200VD21113P64AK	42.00	47.60
C4200VD21213P64AK	46.20	51.80

④			
③			
②			
①			
LTR	NAME	DATE	VERISION RECORD

GENERAL TOLERANCE		UNIT: mm		DATE	
.X ± 0.30	X° ± 1°	DRAWN:	闵昕皓	2013.8.20	
.XX ± 0.20	.X° ±	CHECKED:			
.XXX ± 0.10	.XX° ±	APPROVED:			

TITLE:		
MX 4.2 双排 180度		
WF 空心针带柱		
VER.	SCALE:	N/A
A	SHEET:	1/1

 东莞市康瑞电子有限公司
Dongguan Konnra Electronics co., LTD.

PROJECT	PART NO.	C4200VD2**13P64AK
DRAWING NO.	4200WD205-1-S	