

A

A

B

B

C

C

D



D

E

E

F

F



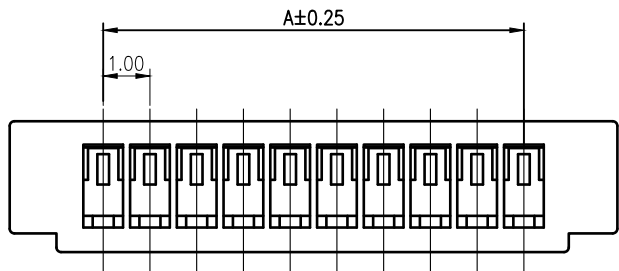


◆ SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 50V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: PBT UL 94V-0
 Circuits: 2~20
 Suitable: KR1000 series Terminal
 Mates With KR1000 Series Single Row Wafer
 Ordering code:

A1000O***69**0
 PIN数 ———┐
 └── G: 无卤
 └── PB: PBT
 └── P6: PA66

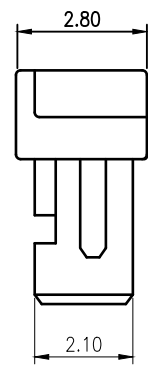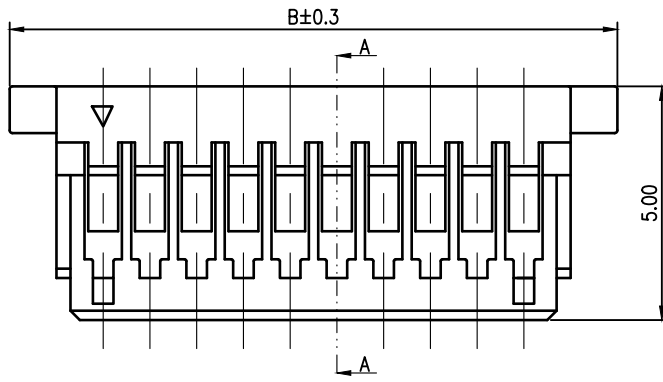

SECTION:A-A

PART NO.	Dimensions	
	A	B
A1000O00269**0	1.00	5.00
A1000O00369**0	2.00	6.00
A1000O00469**0	3.00	7.00
A1000O00569**0	4.00	8.00
A1000O00669**0	5.00	9.00
A1000O00769**0	6.00	10.00
A1000O00869**0	7.00	11.00
A1000O00969**0	8.00	12.00
A1000O01069**0	9.00	13.00
A1000O01169**0	10.00	14.00
A1000O01269**0	11.00	15.00
A1000O01369**0	12.00	16.00
A1000O01469**0	13.00	17.00
A1000O01569**0	14.00	18.00
A1000O01669**0	15.00	19.00
A1000O01769**0	16.00	20.00
A1000O01869**0	17.00	21.00
A1000O01969**0	18.00	22.00
A1000O02069**0	19.00	23.00

△				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE:	
△				.X ± 0.25	X° ± 1°	DRAWN: 朱佑武	JST SH 1.0 Housing	
△				.XX ± 0.15	.X° ±	CHECKED:	VER. SCALE: N/A	
△				.XXX ± 0.10	.XX° ±	APPROVED:	A SHEET: 1/1	
LTR	NAME	DATE	VERSION RECORD				DRAWING NO. 100H101-6-S	

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

PROJECT	PART NO.	A1000O***69**0
DRAWING NO.		100H101-6-S



PROJECT	PART NO.	A1000O***69**0
DRAWING NO.		100H101-6-S