


1 2 3 4 5 6 7 8 9

A

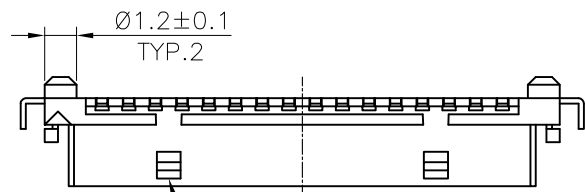



31P以下: 1 lock
31P以上: 2 lock

| PART NO. | Dimensions | | | | |
|------------------|------------|-------|-------|-------|-------|
| | A | B | C | D | E |
| C1003MS02114P41A | 9.00 | 10.00 | 12.50 | 14.30 | 16.10 |
| C1003MS03114P41A | 14.00 | 15.00 | 17.50 | 19.30 | 21.10 |
| C1003MS04114P41A | 19.00 | 20.00 | 22.50 | 24.30 | 26.10 |
| C1003MS05114P41A | 24.00 | 25.00 | 27.50 | 29.30 | 31.10 |


- ◆ SPECIFICATIONS
- Current rating: 0.5A AC, DC
 - Voltage rating: 150V AC, DC
 - Temperature range: -25°C ~ +85°C
 - Insulation resistance: 500MΩ Min.
 - Withstanding voltage: 250V AC/ minute.
 - Contact resistance: 50mΩ Max.

Material:
 Insulator: Nylon 46 UL 94V-0
 Contact: Phosphor bronze
 Solder Nail: Alloy copper
 Plating: Tin plated over Nickel
 Circuits: 21,31,41,51

B

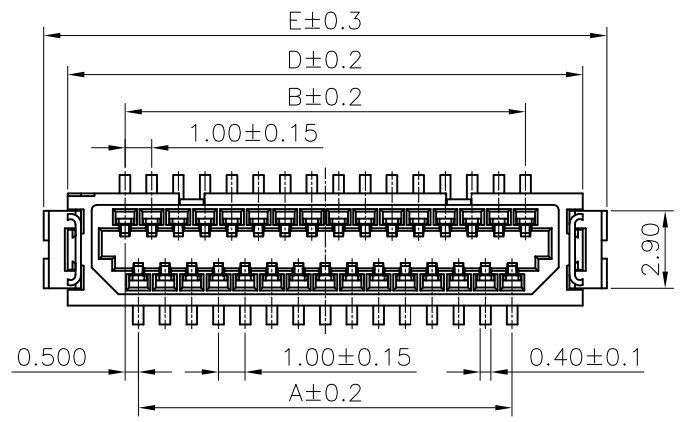


C

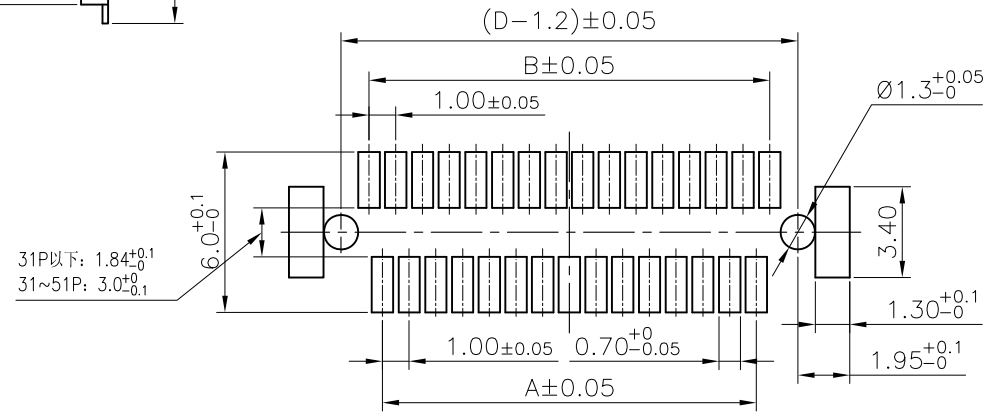

Recommended P.C.Board Layout


D

E

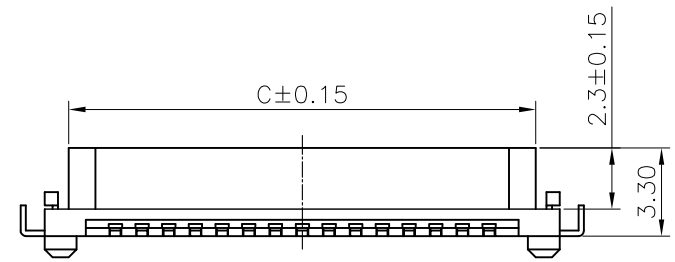

F

| | | | | | | | | | | |
|-----|------|------|----------------|-------------------|----------|---------------|------------------|------------|-----|--|
| ④ | | | | GENERAL TOLERANCE | UNIT: mm | DATE | TITLE: | | | |
| ③ | | | | .X ± 0.30 | X° ± 1° | DRAWN: 朱佑武 | HRS DF9 SMT 180° | | | |
| ② | | | | .XX ± 0.20 | .X° ± | CHECKED: | 母座有柱 | | | |
| ① | | | | .XXX ± 0.10 | .XX° ± | APPROVED: 周志龙 | VER. A | SCALE: 1/1 | N/A | |
| LTR | NAME | DATE | VERSION RECORD | | | 2013.5.7 | SHEET: 1/1 | | | |

 东莞市康瑞电子有限公司
 Dongguan Konra Electronics co., LTD.

PROJECT: PART NO. C1003MS***14P41A

DRAWING NO. 1003WVSF201-1-S

1 2 3 4 5 6 7 8 9