




- ◆ SPECIFICATIONS
- Current rating: 1A AC, DC
 - Voltage rating: 500V AC, DC
 - Temperature range: -25°C ~ +85°C
 - Insulation resistance: 1000MΩ Min.
 - Withstanding voltage: 500V AC/ minute.
 - Contact resistance: 20mΩ Max.

Material:
 Insulator: Nylon 6T UL 94V-0
 Contact: Phosphor Bronze
 Cover: Stainless steel
 Plating: Tin plated over Nickel
 Circuits: 04~26
 Mates With KR1273 Series Female IDC Wafer

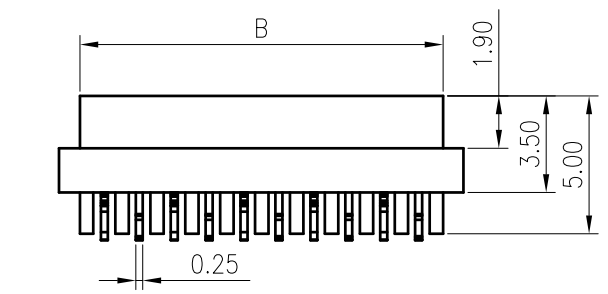


Circuits	Dimension			Q'TY/ Tube
	A	B	C	
04	3.81	5.50	6.99	82
06	6.35	8.04	9.53	60
08	8.89	10.58	12.07	48
10	11.43	13.12	14.61	39
12	13.97	15.66	17.15	33
14	16.51	18.20	19.69	29
16	19.05	20.74	22.23	26
18	21.59	23.28	24.77	23
20	24.13	25.82	27.31	21
22	26.67	28.36	29.85	19
24	29.21	30.90	32.39	17
26	31.75	33.54	34.93	16

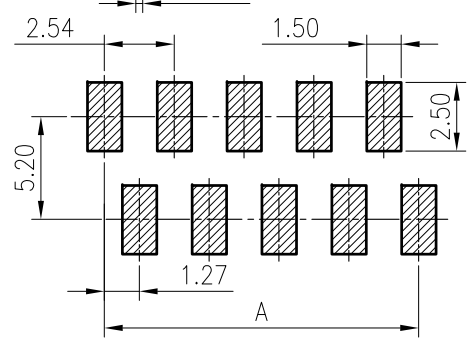


C1273VS***22PT10
 004:04P ——— 1:管装
 026:26P ——— 2:红色

△ Recommended P.C.B Layout(Top Side)
 (Board Tolerance±0.05)

△				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE: Pitch1.27 Male SMT Type Connector		
△				.X±0.30	X°±1°	DRAWN: 闵昕皓	2017.09.14		
△				.XX±0.20	.X°±	CHECKED:			
△	闵昕皓	2017.09.14	依实物更正尺寸及Layout	.XXX±0.10	.XX°±	APPROVED:	VER.	SCALE:	N/A
LTR	NAME	DATE	VERISION RECORD				A1	SHEET:	1/1

 东莞市康瑞电子有限公司
 Dongguan Konnra Electronics co., LTD.

PROJECTION PART NO. C1273VS***22PT10

 DRAWING NO. 1273WMVS201-2-S