
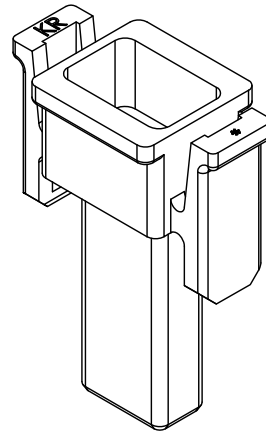


RoHS  
COMPLIANT

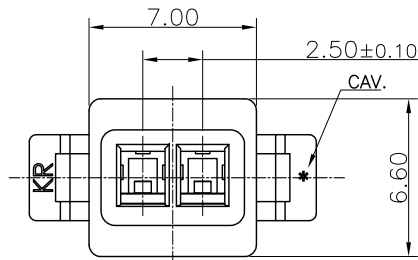

◆ SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -40° C ~ +105° C
- Insulation resistance: 500MΩ Min.
- Withstanding voltage: 500V AC/ minute.



Material: Plastic UL94 V-0  
Circuits: 2~4  
Suitable: KR2517 series

Ordering Code:

H2517M\*\*\*\*\*01B

102=02P ——— 01:PA66 UL94 V-0 white  
103=03P

...

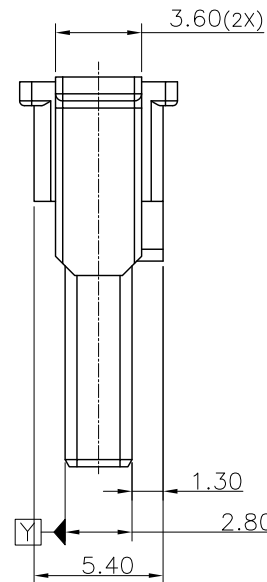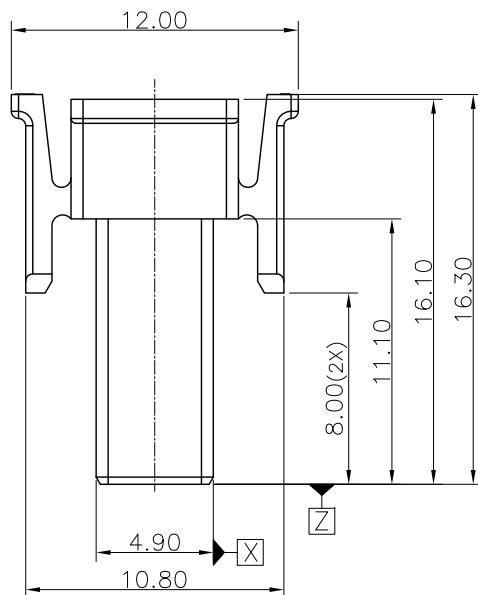

TOLERANCE

X.X ±0.30  
X.XX ±0.20  
X.XXX ±0.10  
Angle ±2°

TITLE:  
M12.50 Female  
housing, Inner  
buckle

DRAWN: Shen 2021.10.08

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司  
DongGuan Konnra Electronics Co.,Ltd.

PART NO.: H2517M\*\*\*\*\*01B



New Specification

Shen

2021.10.08

MARK

REVISION DESCRIPTION

SIGNATURE

DATE

UNIT:mm

SCALE:1/1

SHEET:1/1

PROJECTION

REV.:A1

DRAWING NO.:2517H01-B-Q

1

2

3

4

5

6

7

8

9