

A

B

C

D

E

F

A

B

C

D

E




F

◆ SPECIFICATIONS

- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1500V AC/ minute.
- Contact resistance: 10mΩ Max.



Material:

Insulator: LCP UL 94V-0
 Contact: Brass
 Solder nail: Brass
 Plating: Tin plated
 Circuits: 2~12
 Suitable: KR3000 series single row Housing

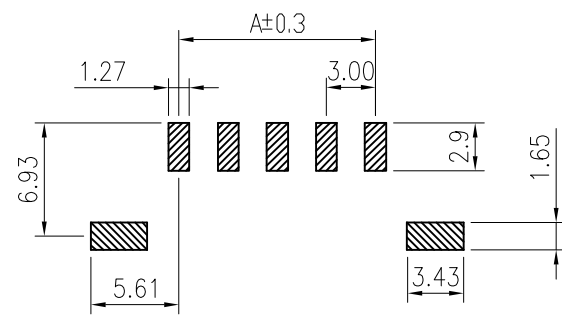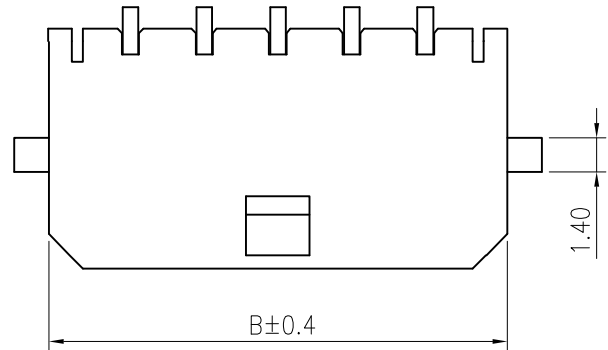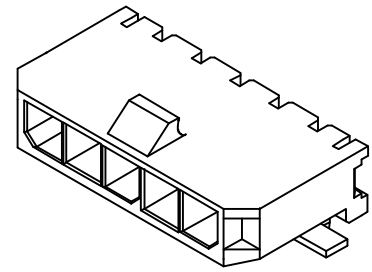

PCB LAYOUT

C3000RS 002 30 LP 2 B W
 002:2P ——— W: MATTE TIN
 012:12P ——— B:SOLDERING FLAKE
 ——— 2:REEL
 ——— 3:PE BAG
 ——— LP:LCP

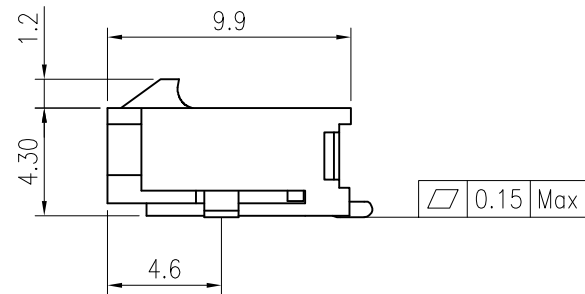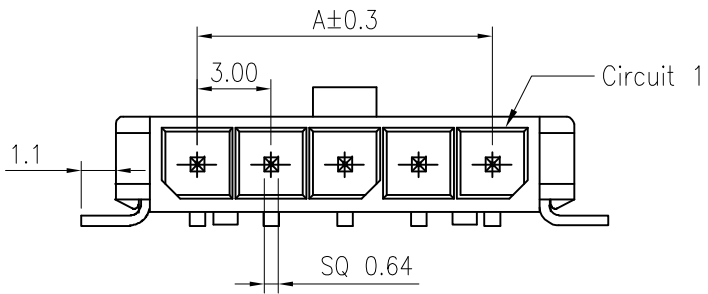

PART NO.	Dimension	
	A	B
C3000RS00230LP2BW	3.0	9.7
C3000RS00330LP2BW	6.0	12.7
C3000RS00430LP2BW	9.0	15.7
C3000RS00530LP2BW	12.0	18.7
C3000RS00630LP2BW	15.0	21.7
C3000RS00730LP2BW	18.0	24.7
C3000RS00830LP2BW	21.0	27.7
C3000RS00930LP2BW	24.0	30.7
C3000RS01030LP2BW	27.0	33.7
C3000RS01130LP2BW	30.0	36.7
C3000RS01230LP2BW	33.0	39.7

△4				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE: MX 3.0 SMT 90° Wafer with TAB VER. SCALE: N/A A1 SHEET: 1/1			
△3				.X±0.30	X° ±1°	DRAWN: Cheng ru yi				2016.01.25
△2				.XX±0.20	.X° ±	CHECKED:				
△1				.XXX±0.10	.XX° ±	APPROVED:				
LTR	NAME	DATE	VERISION RECORD							

东莞市康瑞电子有限公司
 Dongguan Konnra Electronics co., LTD.

PROJECTION	PART NO.	C3000RS***30LP2BW
	DRAWING NO.	3000WHS102-3-S