




◆ SPECIFICATIONS

Current rating: 7A AC, DC
 Voltage rating: 250V AC, DC
 Temperature range: -25°C ~ +85°C
 Insulation resistance: 1000MΩ Min.
 Withstanding voltage: 1500V AC/ minute.
 Contact resistance: 20m Ω Max.

Material: Nylon 66 UL 94V-2
 Mates with KR3000 series Hosing



C3000RS 202 30 LP 2 BW
 202:2*2P
 LP:LCP
 2:卷装

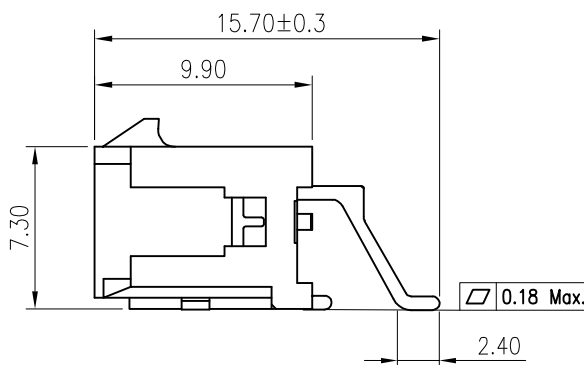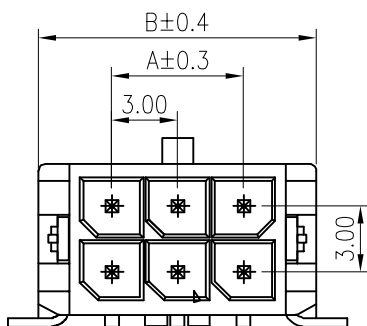

PART NO.	Dimension mm	
	A	B
C3000RS20130LP2BW	--	6.65
C3000RS20230LP2BW	3.0	9.65
C3000RS20330LP2BW	6.0	12.65
C3000RS20430LP2BW	9.0	15.65
C3000RS20530LP2BW	12.0	18.65
C3000RS20630LP2BW	15.0	21.65
C3000RS20730LP2BW	18.0	24.65
C3000RS20830LP2BW	21.0	27.65
C3000RS20930LP2BW	24.0	30.65
C3000RS21030LP2BW	27.0	33.65
C3000RS21130LP2BW	30.0	36.65
C3000RS21230LP2BW	33.0	39.65

④				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE:
③				.X ± 0.30	X° ± 1°	2015.12.04	MX 3.0 SMT Dual Row 90° Wafer With Tab
②				.XX ± 0.20	.X° ±		
①	闵昕皓	2015.12..04	增加尺寸标示	.XXX ± 0.10	.XX° ±		
LTR	NAME	DATE	VERISION RECORD	APPROVED:			

东莞市康瑞电子有限公司 Dongguan Konnra Electronics co., LTD.		
PROJECT	PART NO.	C3000RS***30LP2BW
DRAWING NO.	3000WHS201-3-S	