

1 2 3 4 5 6 7 8 9

A A

B B

C C

D D

E E



F F

◆ SPECIFICATIONS




- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 600V AC/ minute.
- Contact resistance: 20mΩ Max.

Material: Nylon 66 UL 94V-0

Circuits: 2~20

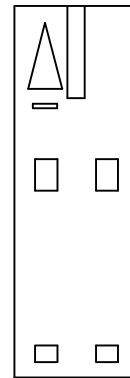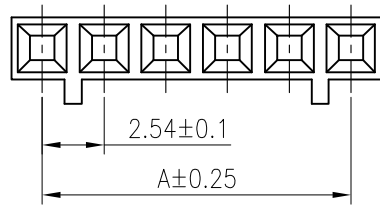

2 Circuits

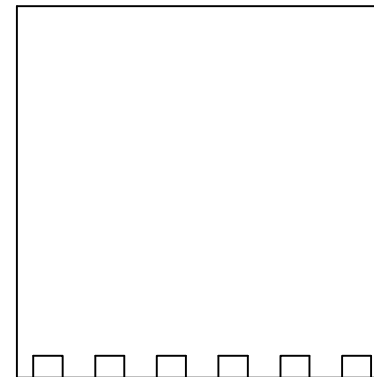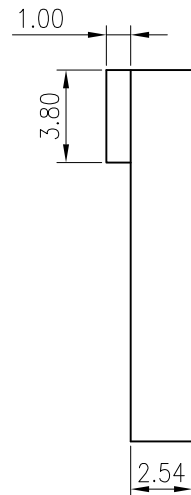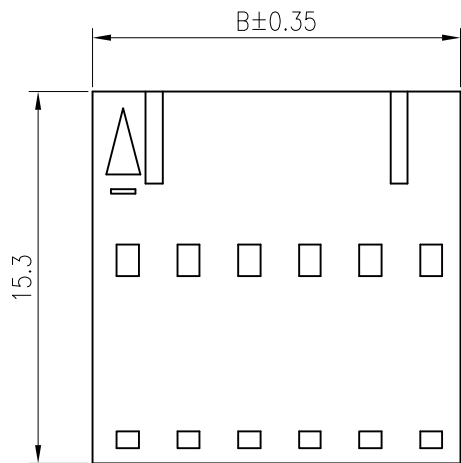


PART No.	Dimension mm	
	A	B
A2541E00250P60	2.54	5.08
A2541E00350P60	5.08	7.62
A2541E00450P60	7.62	10.16
A2541E00550P60	10.16	12.70
A2541E00650P60	12.70	15.24
A2541E00750P60	15.24	17.78
A2541E00850P60	17.78	20.32
A2541E00950P60	20.32	22.86
A2541E01050P60	22.86	25.40
A2541E01150P60	25.40	27.94
A2541E01250P60	27.94	30.48
A2541E01350P60	30.48	33.02
A2541E01450P60	33.02	35.56
A2541E01550P60	35.56	38.10
A2541E01650P60	38.10	40.64
A2541E01750P60	40.64	43.18
A2541E01850P60	43.18	45.72
A2541E01950P60	45.72	48.26
A2541E02050P60	48.26	50.80


④			
③			
②			
①			
LTR	NAME	DATE	VERSION RECORD

GENERAL TOLERANCE		UNIT: mm	DATE
.X ± 0.30	X° ± 1°	DRAWN: 闵昕皓	2014.2.10
.XX ± 0.20	.X° ±	CHECKED:	
.XXX ± 0.10	.XX° ±	APPROVED:	

TITLE: MX 2.54 超薄不带扣 Housing		
VER.	SCALE:	N/A
A	SHEET:	1/1



东莞市康瑞电子有限公司
Dongguan Konnra Electronics co., LTD.

PROJECTION	PART NO.	A2541E***50P60
	DRAWING NO.	2541HM02-5-S

1 2 3 4 5 6 7 8 9