



1 2 3 4 5 6 7 8 9

A


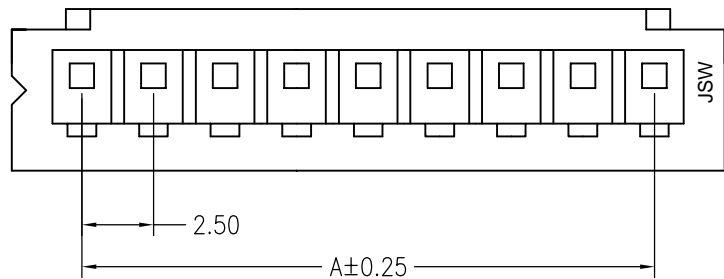


◆ SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC,DC
- Temperature range: -25°C ~ +85°C
- Insulation resistance: 1000MΩ Min.
- Withstanding voltage: 1000V AC/ minute.
- Contact resistance: 20m Ω Max.

Material:Nylon66 UL94V-0
 Suitable KR2501 Series Terminal
 Mates With KR2501 Series Wafer
 MOQ:1,000PCS

B

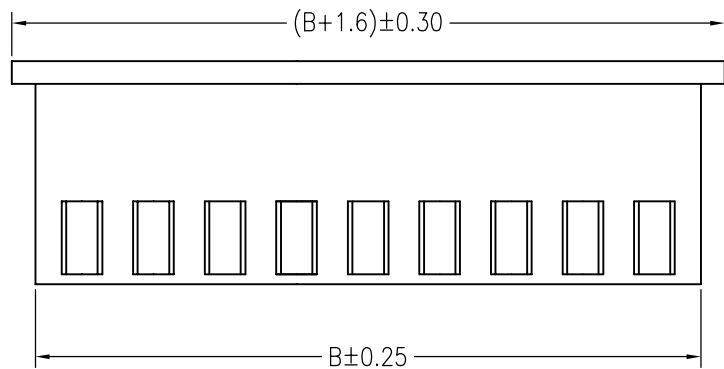

PART No.	Dimensions	
	A	B
A2501O00229P60	2.50	5.75
A2501O00329P60	5.00	8.25
A2501O00429P60	7.50	10.75
A2501O00529P60	10.00	13.25
A2501O00629P60	12.50	15.75
A2501O00729P60	15.00	18.25
A2501O00829P60	17.50	20.75
A2501O00929P60	20.00	23.25
A2501O01029P60	22.50	25.75
A2501O01129P60	25.00	28.25
A2501O01229P60	27.50	30.75
A2501O01329P60	30.00	33.25
A2501O01429P60	32.50	35.75
A2501O01529P60	35.00	38.25
A2501O01629P60	37.50	40.75

C

D

E

F

 				GENERAL TOLERANCE	UNIT: mm	DATE	TITLE: 仿JST XH 2.50 Housing			东莞市康瑞电子有限公司 Dongguan Konnra Electronics co., LTD.	
				.X ±0.30 X°±1°	DRAWN: 闵昕皓	2013.4.17	VER.	SCALE:	N/A		
				.XX ±0.20 .X°±	CHECKED:			PROJ	PART NO.		A25010***29P60
	LTR	NAME	DATE	VERISION RECORD	.XXX±0.10 .XX°±	APPROVED: 周志龙	2013.4.17	A	SHEET:		1/1

1 2 3 4 5 6 7 8 9